


# PERI UP FLEX STAIRTOWERS

## Staircase 75 – 2.5m Alternating

Compliance Sheets

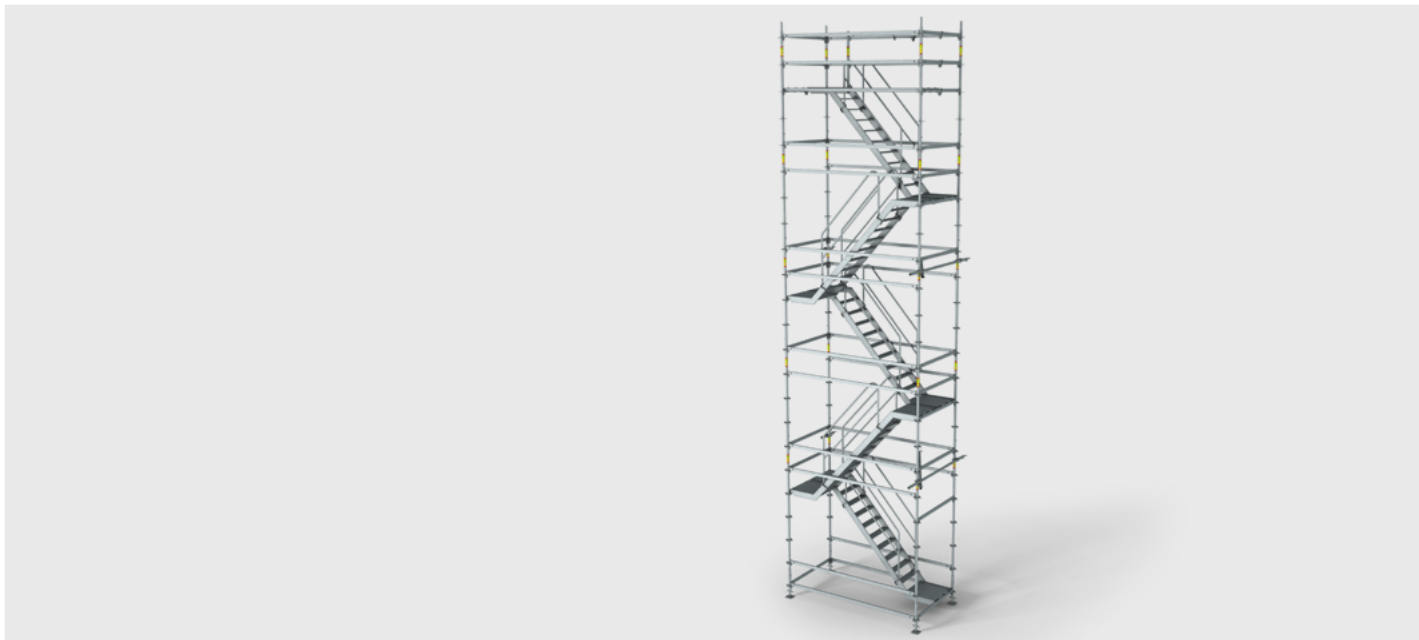

## Index

PERI UP 2.5m Alt Stair Tower 03300mm	1
PERI UP 2.5m Alt Stair Tower 03300mm Kit List	2
PERI UP 2.5m Alt Stair Tower 04300mm	3
PERI UP 2.5m Alt Stair Tower 04300mm Kit List	4
PERI UP 2.5m Alt Stair Tower 05300mm	5
PERI UP 2.5m Alt Stair Tower 05300mm Kit List	6
PERI UP 2.5m Alt Stair Tower 06300mm	7
PERI UP 2.5m Alt Stair Tower 06300mm Kit List	8
PERI UP 2.5m Alt Stair Tower 06300mm - 3m Lifts	9
PERI UP 2.5m Alt Stair Tower 06300mm - 3m Lifts Kit List	10
PERI UP 2.5m Alt Stair Tower 07300mm	11
PERI UP 2.5m Alt Stair Tower 07300mm Kit List	12
PERI UP 2.5m Alt Stair Tower 08300mm	13
PERI UP 2.5m Alt Stair Tower 08300mm Kit List	14
PERI UP 2.5m Alt Stair Tower 09300mm	15
PERI UP 2.5m Alt Stair Tower 09300mm Kit List	16
PERI UP 2.5m Alt Stair Tower 09300mm – 3m Lifts	17
PERI UP 2.5m Alt Stair Tower 09300mm – 3m Lifts Kit List	18
PERI UP 2.5m Alt Stair Tower 10300mm	19
PERI UP 2.5m Alt Stair Tower 10300mm Kit List	20
PERI UP 2.5m Alt Stair Tower 11300mm	21
PERI UP 2.5m Alt Stair Tower 11300mm Kit List	22
PERI UP 2.5m Alt Stair Tower 12300mm	23
PERI UP 2.5m Alt Stair Tower 12300mm Kit List	24
PERI UP 2.5m Alt Stair Tower 12300mm – 3m Lifts	25
PERI UP 2.5m Alt Stair Tower 12300mm – 3m Lifts Kit List	26
PERI UP 2.5m Alt Stair Tower 13300mm	27
PERI UP 2.5m Alt Stair Tower 13300mm Kit List	28
PERI UP 2.5m Alt Stair Tower 14300mm	29
PERI UP 2.5m Alt Stair Tower 14300mm Kit List	30
PERI UP 2.5m Alt Stair Tower 15300mm	31
PERI UP 2.5m Alt Stair Tower 15300mm Kit List	32
PERI UP 2.5m Alt Stair Tower 15300mm – 3m Lifts	33
PERI UP 2.5m Alt Stair Tower 15300mm – 3m Lifts Kit List	34
PERI UP 2.5m Alt Stair Tower 16300mm	35
PERI UP 2.5m Alt Stair Tower 16300mm Kit List	36
PERI UP 2.5m Alt Stair Tower 17300mm	37
PERI UP 2.5m Alt Stair Tower 17300mm Kit List	38
PERI UP 2.5m Alt Stair Tower 18300mm	39
PERI UP 2.5m Alt Stair Tower 18300mm Kit List	40
PERI UP 2.5m Alt Stair Tower 18300mm – 3m Lifts	41
PERI UP 2.5m Alt Stair Tower 18300mm – 3m Lifts Kit List	42
PERI UP 2.5m Alt Stair Tower 19300mm	43
PERI UP 2.5m Alt Stair Tower 19300mm Kit List	44
PERI UP 2.5m Alt Stair Tower 20300mm	45
PERI UP 2.5m Alt Stair Tower 20300mm Kit List	46
Run-off Configurations. Details	47
Run-off Configurations.	48



Maximum / Practical No Persons permitted on Stair Tower = 8



Calculated Leg Load= 4.5 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 1.0 kN  
Max. Calc. Force A<sup>⊥</sup>: 1.8 kN  
Max. Calc. Tube Axial Force: 2.0 kN

**Netted Scaffold (<0.6cf<sub>⊥</sub>)\***

Max. Calc. Force All : 2.4 kN  
Max. Calc. Force A<sup>⊥</sup>: 4.2 kN  
Max. Calc. Tube Axial Force: 4.8 kN

**Sheeted Scaffold**

Max. Calc. Force All : 2.6 kN  
Max. Calc. Force A<sup>⊥</sup>: 4.6 kN  
Max. Calc. Tube Axial Force: 5.2 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 550 kg




**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 3.3 m  
Lift Heights: 3.0 m



Scaffold placed Max 0.3m from the structure

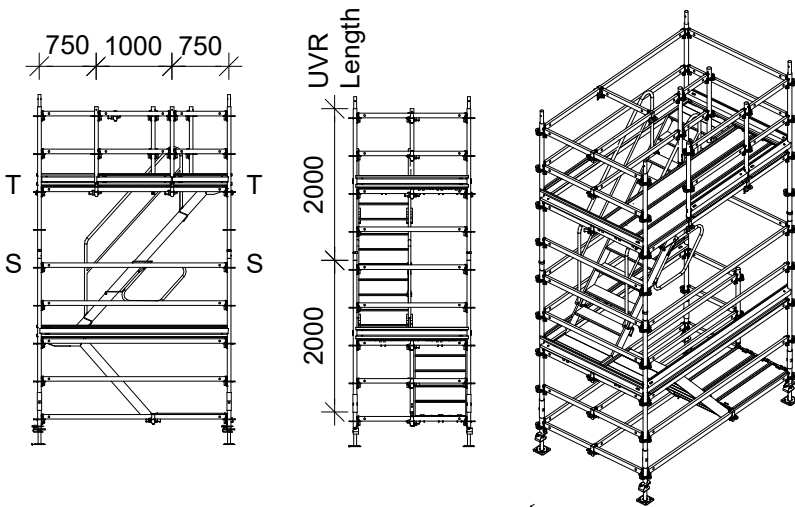

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN


Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 3.0m high		June 2022	1

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	8	PC	0.06	0.47
100009	Standard UVR 200	8	PC	10.00	80.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	16	PC	4.72	75.52
114648	Ledger UH 250 Plus	17	PC	7.36	125.12
124118	Steel Deck UDG 25 x 100	3	PC	6.63	19.89
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111117	Staircase UAS 75 x 250/200, Alu	1	PC	28.00	28.00
100742	Stair Guardrail UAG	2	PC	10.00	20.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	11	PC	1.09	11.99
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	3	PC	2.99	8.97
110208	Toeboard Steel UPY 250	3	PC	5.06	15.18
	<b>Total weight</b>		kg		<b>542.49</b>

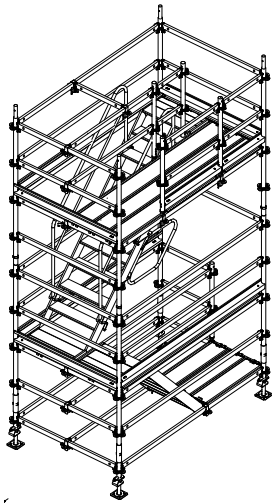

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 3.3m high. Kit List		June 2022	2



Maximum / Practical No Persons permitted on Stair Tower = 10



Calculated Leg Load= 5.5 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 1.3 kN  
Max. Calc. Force A<sup>⊥</sup>: 2.4 kN  
Max. Calc. Tube Axial Force: 2.7 kN

**Netted Scaffold (<0.6cf<sub>⊥</sub>)\***

Max. Calc. Force All : 3.1 kN  
Max. Calc. Force A<sup>⊥</sup>: 5.6 kN  
Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 2.6 kN  
Max. Calc. Force A<sup>⊥</sup>: 4.6 kN  
Max. Calc. Tube Axial Force: 5.2 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 590 kg




**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 4.3 m  
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

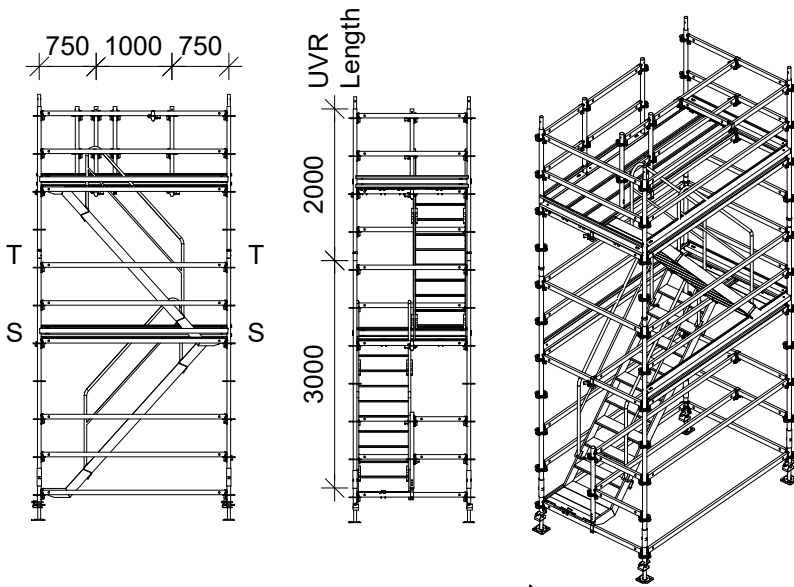

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600


Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 4.3m high		June 2022	3

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	8	PC	0.06	0.47
100009	Standard UVR 200	4	PC	10.00	40.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	18	PC	4.72	84.96
114648	Ledger UH 250 Plus	19	PC	7.36	139.84
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111117	Staircase UAS 75 x 250/200, Alu	2	PC	28.00	56.00
100742	Stair Guardrail UAG	4	PC	10.00	40.00
110793	Ledger to Ledger Coupler UHA Half	10	PC	1.09	10.90
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	3	PC	2.99	8.97
110208	Toeboard Steel UPY 250	3	PC	5.06	15.18
<b>Total weight</b>			kg		<b>586.68</b>

Bins and Pallets are not included in the material list.

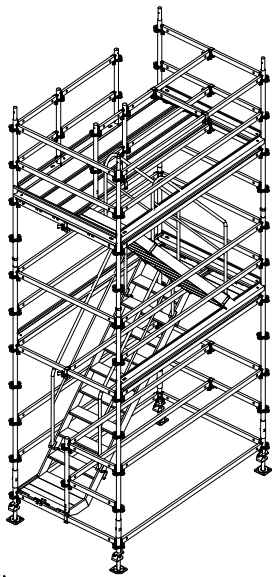

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 OAN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 4.3m high. Kit List		June 2022	4



Maximum / Practical No Persons permitted on Stair Tower = 11



Calculated Leg Load= 6.0 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 1.6 kN  
Max. Calc. Force A<sup>⊥</sup>: 2.9 kN  
Max. Calc. Tube Axial Force: 3.3 kN

**Netted Scaffold (<0.6cf<sub>⊥</sub>)\***

Max. Calc. Force All : 1.7 kN  
Max. Calc. Force A<sup>⊥</sup>: 3.0 kN  
Max. Calc. Tube Axial Force: 3.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>⊥</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 730 kg




**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 5.3 m  
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

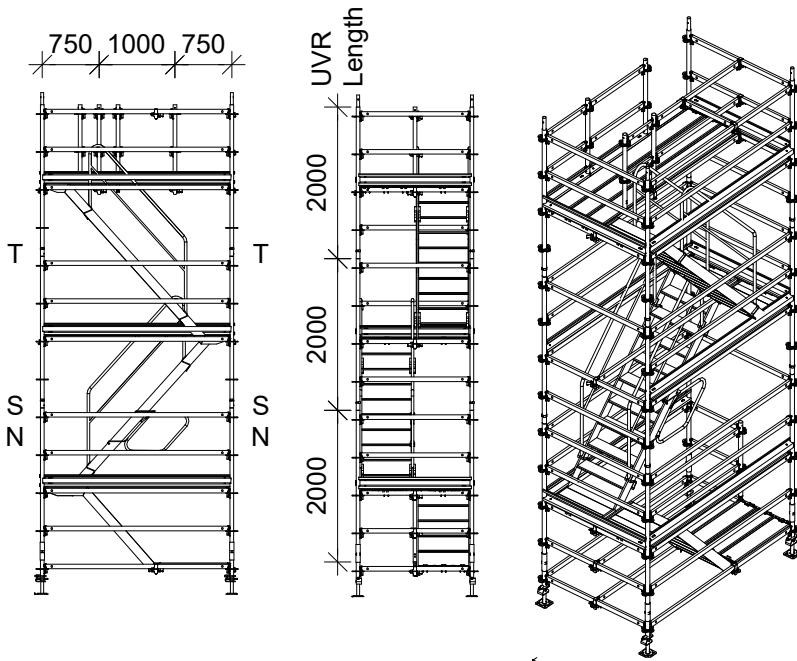

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600


Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 5.3m high		June 2022	5

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	12	PC	0.06	0.71
100009	Standard UVR 200	12	PC	10.00	120.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	22	PC	4.72	103.84
114648	Ledger UH 250 Plus	24	PC	7.36	176.64
124118	Steel Deck UDG 25 x 100	3	PC	6.63	19.89
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111117	Staircase UAS 75 x 250/200, Alu	2	PC	28.00	56.00
100742	Stair Guardrail UAG	4	PC	10.00	40.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	13	PC	1.09	14.17
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	4	PC	2.99	11.96
110208	Toeboard Steel UPY 250	5	PC	5.06	25.30
<b>Total weight</b>			kg		<b>725.86</b>

*Bins and Pallets are not included in the material list.*

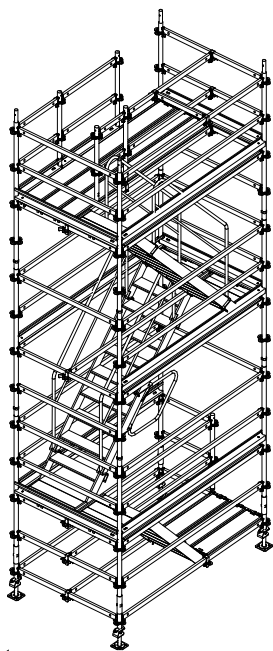

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 5.3m high. Kit List		June 2022	6





Maximum / Practical No Persons permitted on Stair Tower = 12



Calculated Leg Load= 7.2 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.0 kN  
Max. Calc. Force A<sup>⊥</sup>: 3.5 kN  
Max. Calc. Tube Axial Force: 4.0 kN

**Netted Scaffold (<0.6cf<sub>⊥</sub>)\***

Max. Calc. Force All : 3.1 kN  
Max. Calc. Force A<sup>⊥</sup>: 5.6 kN  
Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>⊥</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 770 kg




**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 6.3 m  
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

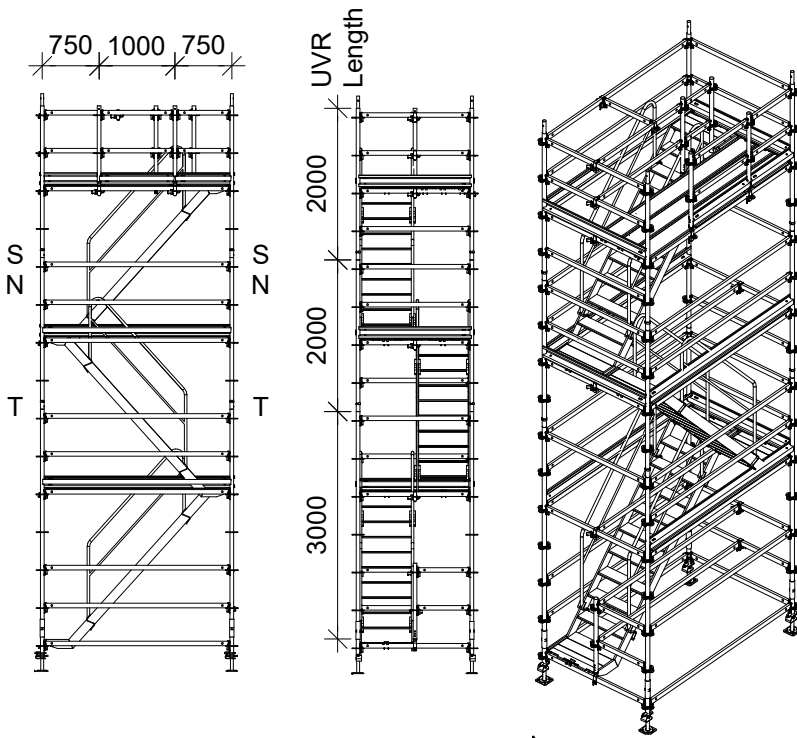

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600


Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 6.3m high		June 2022	7

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	12	PC	0.06	0.71
100009	Standard UVR 200	8	PC	10.00	80.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	24	PC	4.72	113.28
114648	Ledger UH 250 Plus	26	PC	7.36	191.36
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111117	Staircase UAS 75 x 250/200, Alu	3	PC	28.00	84.00
100742	Stair Guardrail UAG	6	PC	10.00	60.00
110793	Ledger to Ledger Coupler UHA Half	12	PC	1.09	13.08
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	4	PC	2.99	11.96
110208	Toeboard Steel UPY 250	5	PC	5.06	25.30
<b>Total weight</b>			kg		<b>770.05</b>

*Bins and Pallets are not included in the material list.*

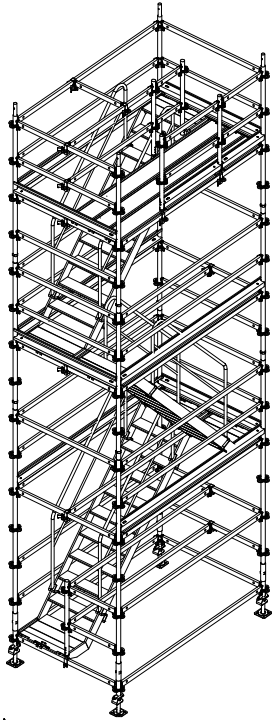

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 6.3m high. Kit List		June 2022	8



Maximum / Practical No Persons permitted on Stair Tower = 13



Calculated Leg Load= 7.0 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.0 kN  
Max. Calc. Force A<sup>⊥</sup>: 3.5 kN  
Max. Calc. Tube Axial Force: 4.0 kN

**Netted Scaffold (<0.6cf<sub>⊥</sub>)\***

Max. Calc. Force All : 2.4 kN  
Max. Calc. Force A<sup>⊥</sup>: 4.2 kN  
Max. Calc. Tube Axial Force: 4.8 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>⊥</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 890 kg




**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 6.3 m  
Lift Heights: 3.0 m



Scaffold placed Max 0.3m from the structure

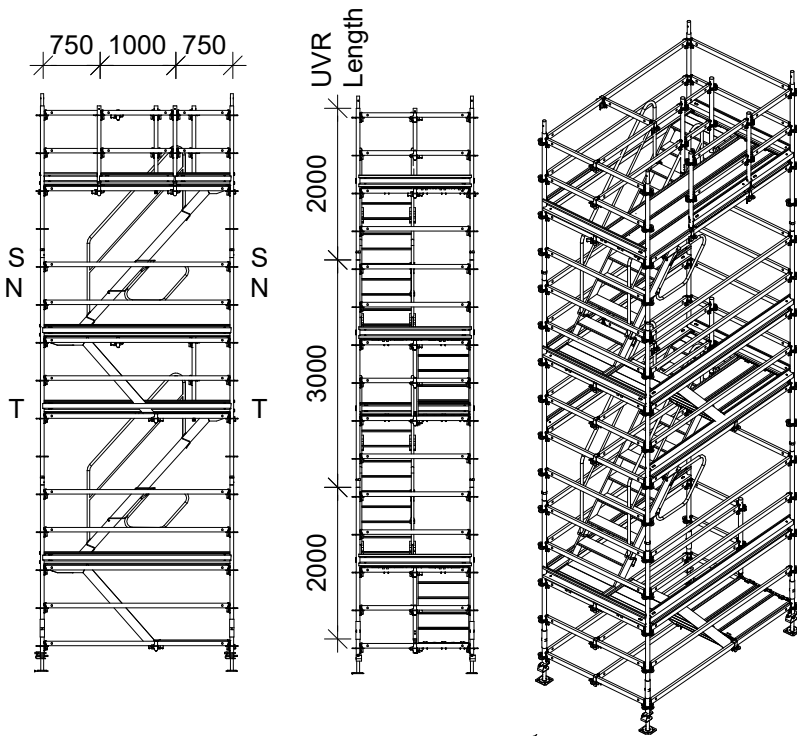

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN


Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5 x 1.5m A/t 6.3m high (3m lifts).		June 2022	9

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	12	PC	0.06	0.71
100009	Standard UVR 200	8	PC	10.00	80.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	6	PC	4.61	27.66
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	8	PC	2.73	21.84
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	27	PC	4.72	127.44
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114648	Ledger UH 250 Plus	28	PC	7.36	206.08
124118	Steel Deck UDG 25 x 100	6	PC	6.63	39.78
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	2	PC	17.90	35.80
111117	Staircase UAS 75 x 250/200, Alu	2	PC	28.00	56.00
100742	Stair Guardrail UAG	4	PC	10.00	40.00
133543	Stair Guardrail UAH-2	2	PC	4.51	9.02
110793	Ledger to Ledger Coupler UHA Half	19	PC	1.09	20.71
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	5	PC	2.99	14.95
110208	Toeboard Steel UPY 250	7	PC	5.06	35.42
<b>Total weight</b>			kg		<b>883.05</b>

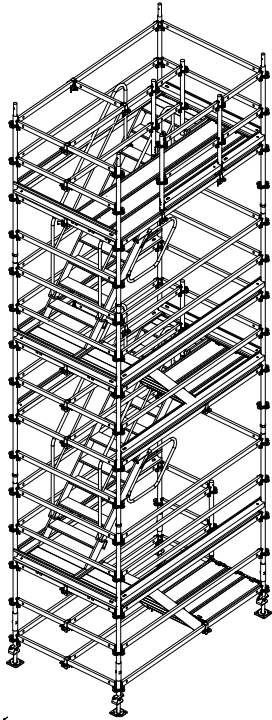

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5 x 1.5m A/t 6.3m high (3m lifts). Kit List		June 2022	10



Maximum / Practical No Persons permitted on Stair Tower = 14



Calculated Leg Load= 7.0 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.3 kN  
Max. Calc. Force A<sup>L</sup>: 4.1 kN  
Max. Calc. Tube Axial Force: 4.7 kN

**Netted Scaffold (<0.6cf<sub>1</sub>)\***

Max. Calc. Force All : 3.1 kN  
Max. Calc. Force A<sup>L</sup>: 5.6 kN  
Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>L</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 920 kg




**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 7.3 m  
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

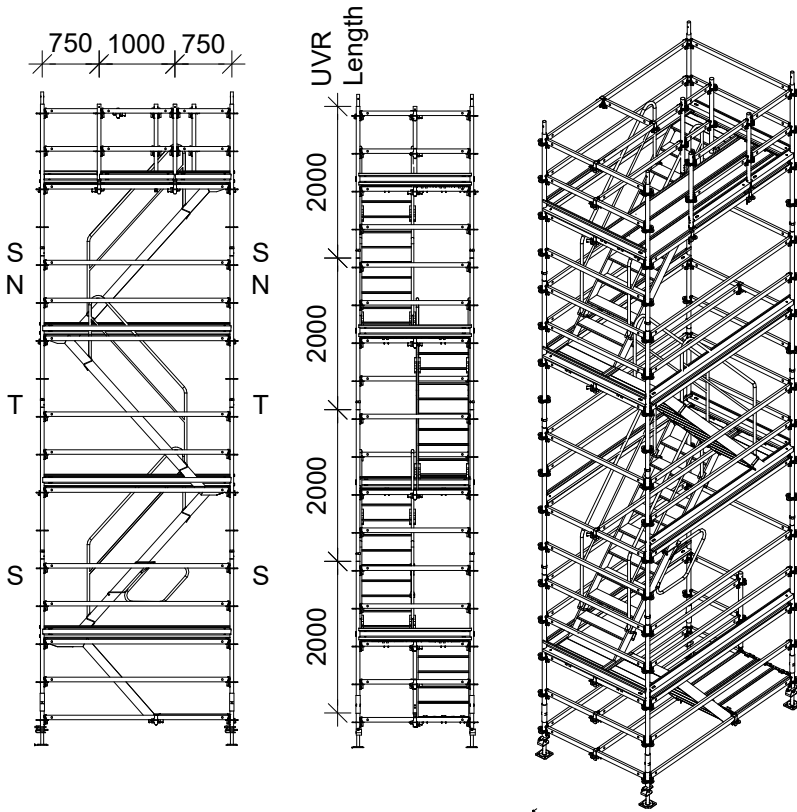

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600


Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 7.3m high		June 2022	11

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	16	PC	0.06	0.94
100009	Standard UVR 200	16	PC	10.00	160.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	29	PC	4.72	136.88
114648	Ledger UH 250 Plus	31	PC	7.36	228.16
124118	Steel Deck UDG 25 x 100	3	PC	6.63	19.89
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111117	Staircase UAS 75 x 250/200, Alu	3	PC	28.00	84.00
100742	Stair Guardrail UAG	6	PC	10.00	60.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	15	PC	1.09	16.35
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	5	PC	2.99	14.95
110208	Toeboard Steel UPY 250	7	PC	5.06	35.42
<b>Total weight</b>			kg		<b>913.95</b>

*Bins and Pallets are not included in the material list.*

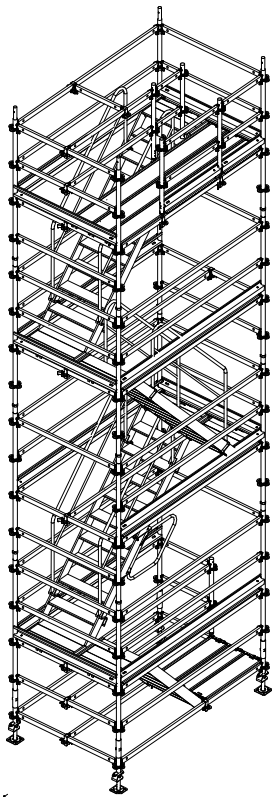

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600  
Fax: 01788861610

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 7.3m high. Kit List		June 2022	12



Maximum / Practical No Persons permitted on Stair Tower = 14



Calculated Leg Load= 8.5 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 1.3 kN  
Max. Calc. Force A<sup>L</sup>: 2.4 kN  
Max. Calc. Tube Axial Force: 2.7 kN

**Netted Scaffold (<0.6cf<sub>L</sub>)\***

Max. Calc. Force All : 3.1 kN  
Max. Calc. Force A<sup>L</sup>: 5.6 kN  
Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>L</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 960 kg




**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 8.3 m  
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

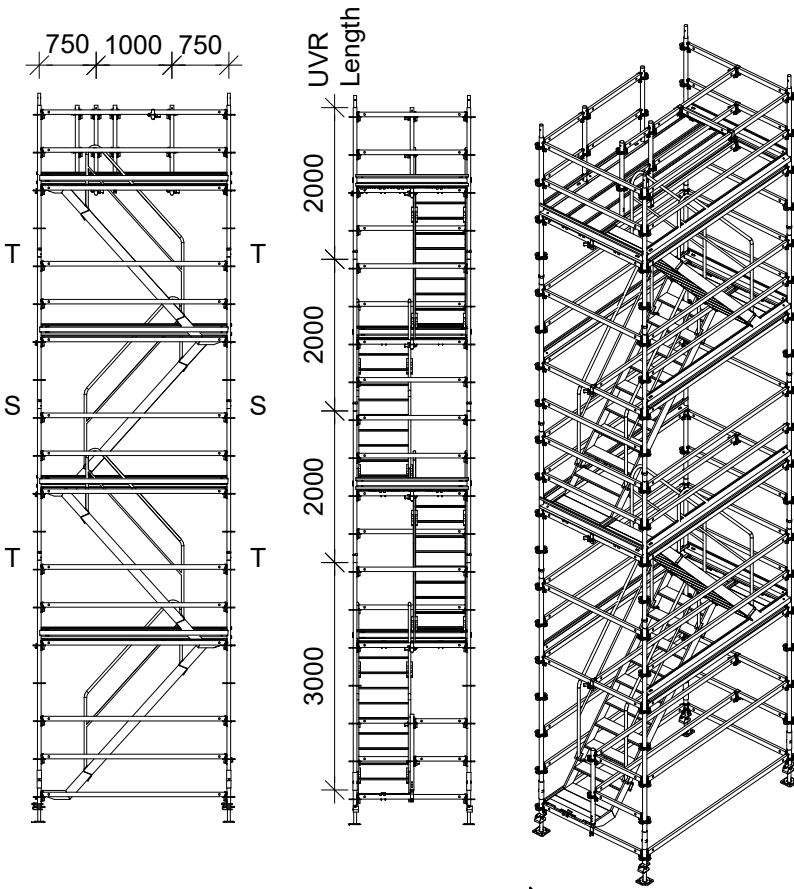

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 8.3m high		June 2022	13

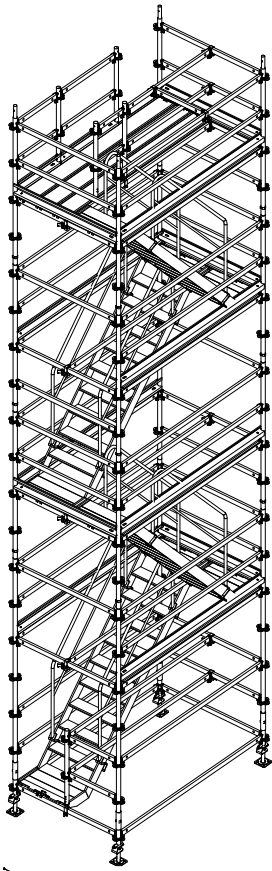

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	16	PC	0.06	0.94
100009	Standard UVR 200	12	PC	10.00	120.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	30	PC	4.72	141.60
114648	Ledger UH 250 Plus	33	PC	7.36	242.88
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111117	Staircase UAS 75 x 250/200, Alu	4	PC	28.00	112.00
100742	Stair Guardrail UAG	8	PC	10.00	80.00
110793	Ledger to Ledger Coupler UHA Half	14	PC	1.09	15.26
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	5	PC	2.99	14.95
110208	Toeboard Steel UPY 250	7	PC	5.06	35.42
<b>Total weight</b>			kg		<b>953.42</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 8.3m high. Kit List		June 2022	14





Maximum / Practical No Persons permitted on Stair Tower = 17



Calculated Leg Load= 9.5 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 1.3 kN  
Max. Calc. Force A<sup>⊥</sup>: 2.4 kN  
Max. Calc. Tube Axial Force: 2.7 kN

**Netted Scaffold (<0.6cf⊥)\***

Max. Calc. Force All : 3.1 kN  
Max. Calc. Force A<sup>⊥</sup>: 5.6 kN  
Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>⊥</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1100 kg




**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 9.3 m  
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

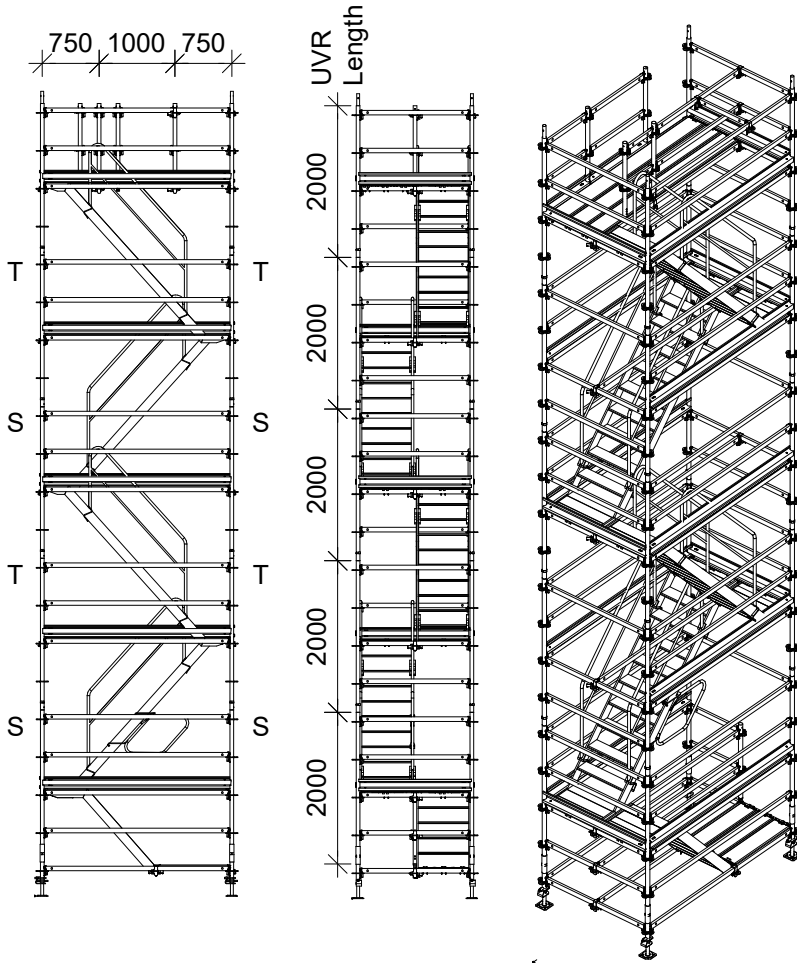

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 9.3m high		June 2022	15

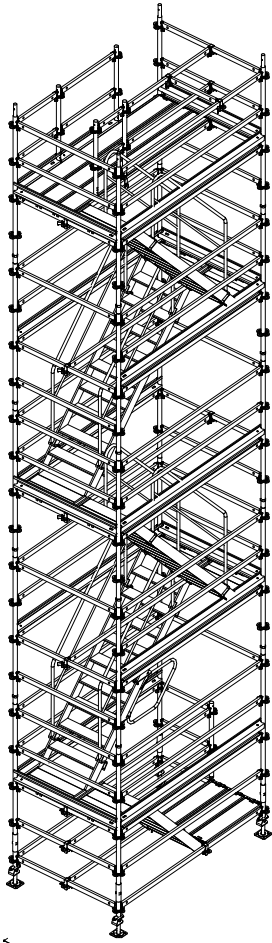

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	20	PC	0.06	1.18
100009	Standard UVR 200	20	PC	10.00	200.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	34	PC	4.72	160.48
114648	Ledger UH 250 Plus	38	PC	7.36	279.68
124118	Steel Deck UDG 25 x 100	3	PC	6.63	19.89
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111117	Staircase UAS 75 x 250/200, Alu	4	PC	28.00	112.00
100742	Stair Guardrail UAG	8	PC	10.00	80.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	17	PC	1.09	18.53
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	6	PC	2.99	17.94
110208	Toeboard Steel UPY 250	9	PC	5.06	45.54
<b>Total weight</b>			kg		<b>1,092.60</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 9.3m high. Kit List		June 2022	16



Maximum / Practical No Persons permitted on Stair Tower = 17



Calculated Leg Load= 9.0 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.3 kN  
Max. Calc. Force A<sup>L</sup>: 4.1 kN  
Max. Calc. Tube Axial Force: 4.7 kN

**Netted Scaffold (<0.6cf<sub>L</sub>)\***

Max. Calc. Force All : 2.4 kN  
Max. Calc. Force A<sup>L</sup>: 4.2 kN  
Max. Calc. Tube Axial Force: 4.8 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>L</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1230 kg




**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 9.3 m  
Lift Heights: 3.0 m



Scaffold placed Max 0.3m from the structure

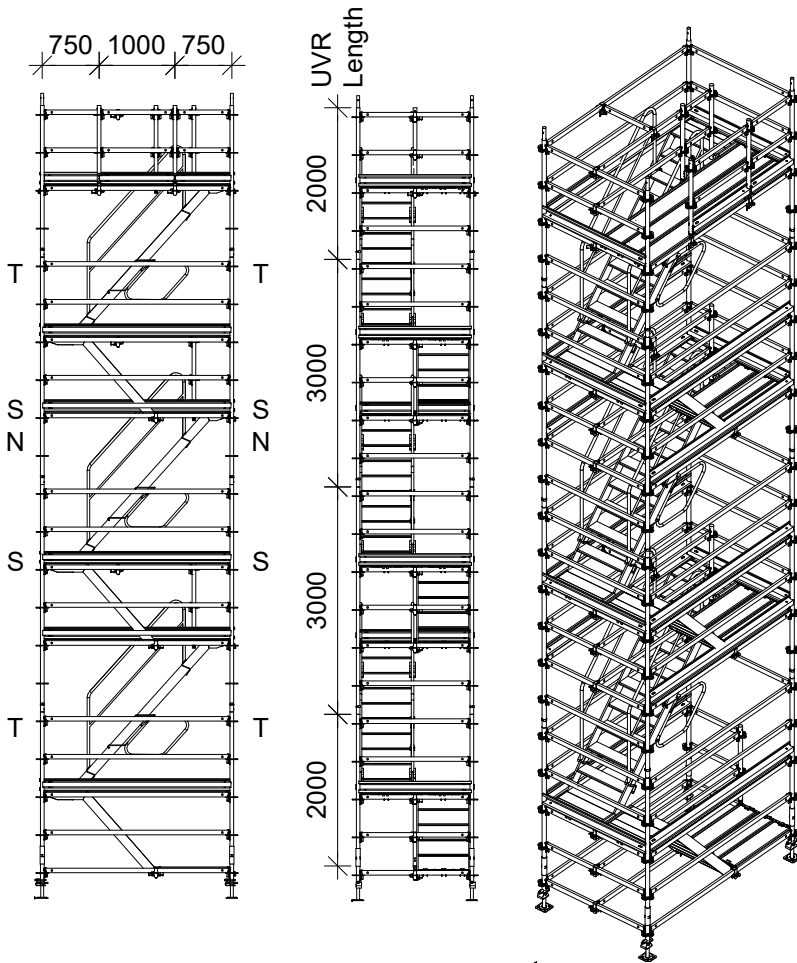

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 9.3m high. (3m lifts)		June 2022	17

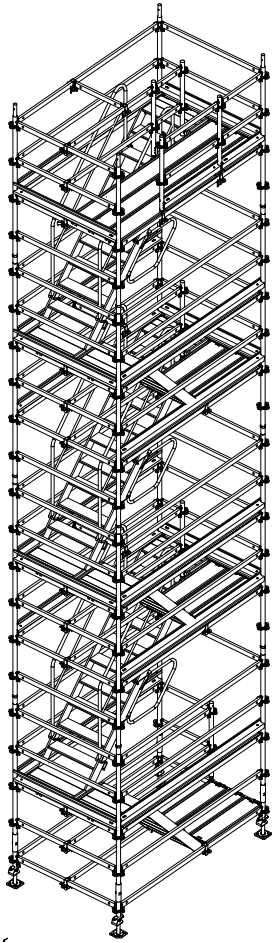

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	16	PC	0.06	0.94
100009	Standard UVR 200	8	PC	10.00	80.00
100012	Standard UVR 300	8	PC	14.70	117.60
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	7	PC	4.61	32.27
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	10	PC	2.73	27.30
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	38	PC	4.72	179.36
114645	Ledger UH 200 Plus	4	PC	6.04	24.16
114648	Ledger UH 250 Plus	39	PC	7.36	287.04
124118	Steel Deck UDG 25 x 100	9	PC	6.63	59.67
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	3	PC	17.90	53.70
111117	Staircase UAS 75 x 250/200, Alu	3	PC	28.00	84.00
100742	Stair Guardrail UAG	6	PC	10.00	60.00
133543	Stair Guardrail UAH-2	3	PC	4.51	13.53
110793	Ledger to Ledger Coupler UHA Half	27	PC	1.09	29.43
109764	UH Spigot	3	PC	1.25	3.75
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	7	PC	2.99	20.93
110208	Toeboard Steel UPY 250	11	PC	5.06	55.66
<b>Total weight</b>			kg		<b>1,223.61</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 OAN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5 x 1.5m A/t 9.3m high.(3m lifts) Kit List		June 2022	18



Maximum / Practical No Persons permitted on Stair Tower = 19



Calculated Leg Load= 10.0 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.0 kN  
Max. Calc. Force A<sup>L</sup>: 3.5 kN  
Max. Calc. Tube Axial Force: 4.0 kN

**Netted Scaffold (<0.6cf1)\***

Max. Calc. Force All : 3.1 kN  
Max. Calc. Force A<sup>L</sup>: 5.6 kN  
Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>L</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1140 kg




**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 10.3 m  
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

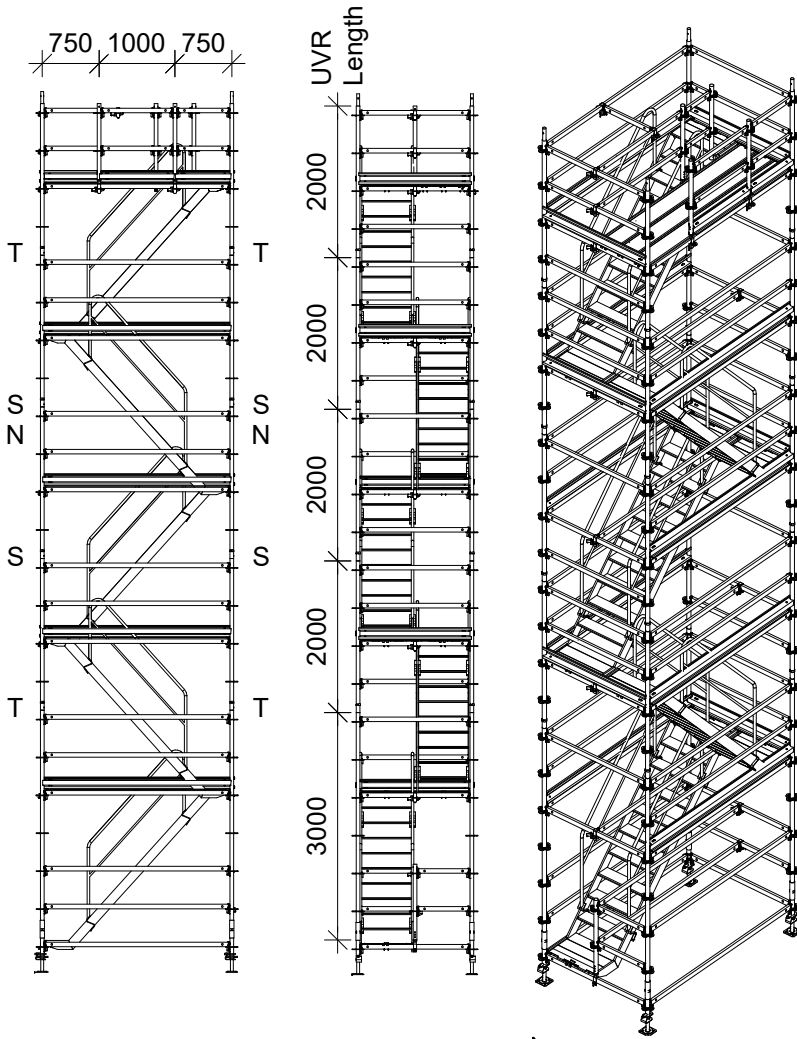

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 10.3m high		June 2022	19

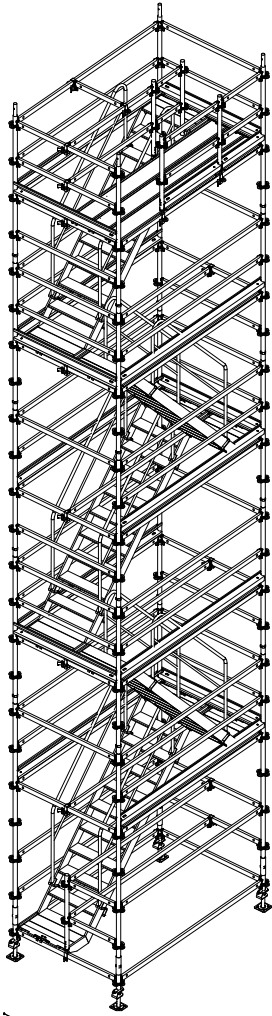

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	20	PC	0.06	1.18
100009	Standard UVR 200	16	PC	10.00	160.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	36	PC	4.72	169.92
114648	Ledger UH 250 Plus	40	PC	7.36	294.40
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111117	Staircase UAS 75 x 250/200, Alu	5	PC	28.00	140.00
100742	Stair Guardrail UAG	10	PC	10.00	100.00
110793	Ledger to Ledger Coupler UHA Half	16	PC	1.09	17.44
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	6	PC	2.99	17.94
110208	Toeboard Steel UPY 250	9	PC	5.06	45.54
<b>Total weight</b>			kg		<b>1,136.79</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 10.3m high. Kit List		June 2022	20



Maximum / Practical No Persons permitted on Stair Tower = 20




Calculated Leg Load= 10.5 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

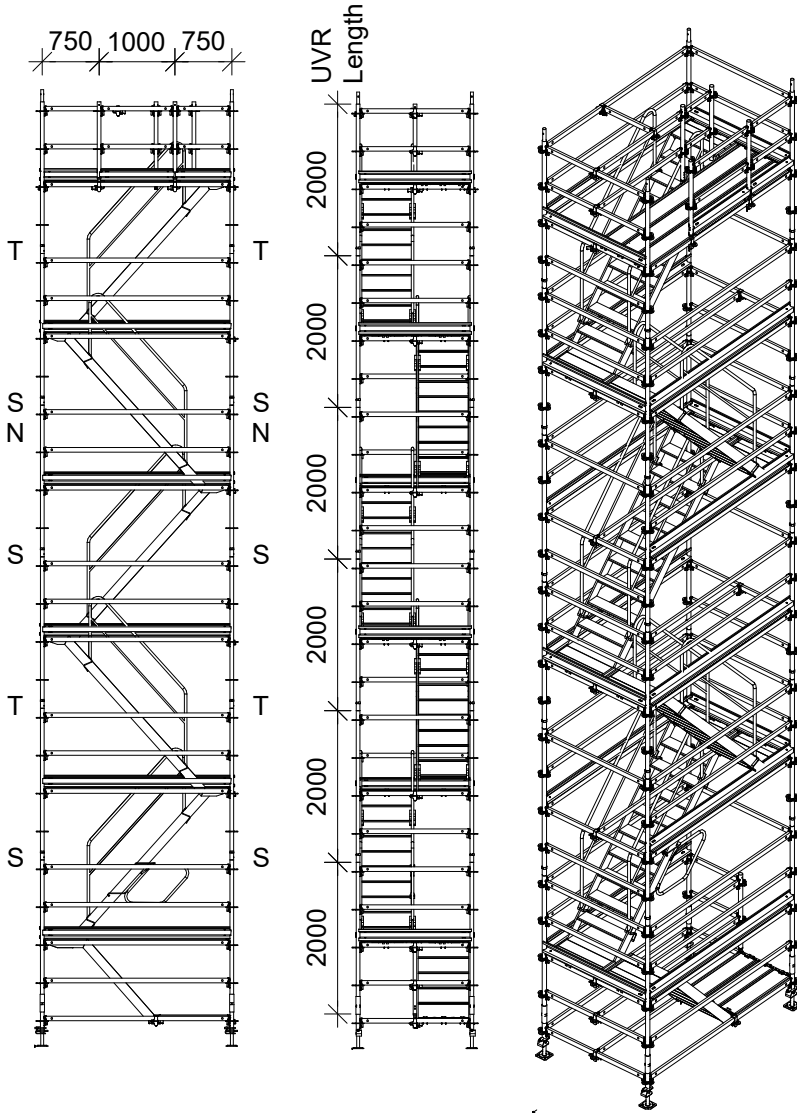

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.0 kN  
Max. Calc. Force A<sup>⊥</sup>: 3.5 kN  
Max. Calc. Tube Axial Force: 4.0 kN

**Netted Scaffold (<0.6cf⊥)\***

Max. Calc. Force All : 3.1 kN  
Max. Calc. Force A<sup>⊥</sup>: 5.6 kN  
Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>⊥</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1280 kg



**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 11.3 m  
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 11.3m high		June 2022	21

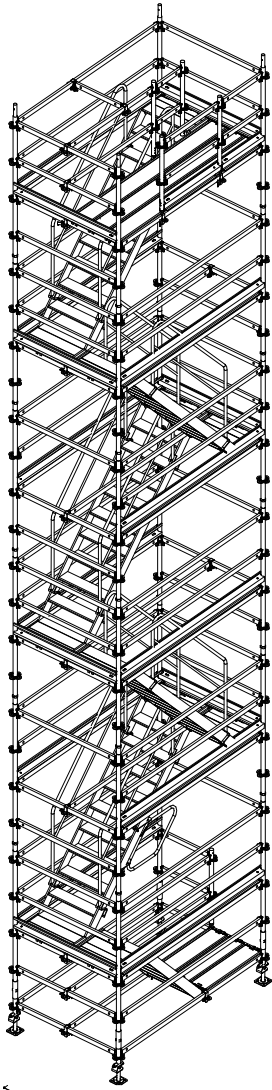

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	24	PC	0.06	1.42
100009	Standard UVR 200	24	PC	10.00	240.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	40	PC	4.72	188.80
114648	Ledger UH 250 Plus	45	PC	7.36	331.20
124118	Steel Deck UDG 25 x 100	3	PC	6.63	19.89
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111117	Staircase UAS 75 x 250/200, Alu	5	PC	28.00	140.00
100742	Stair Guardrail UAG	10	PC	10.00	100.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	19	PC	1.09	20.71
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	7	PC	2.99	20.93
110208	Toeboard Steel UPY 250	11	PC	5.06	55.66
<b>Total weight</b>			kg		<b>1,275.97</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 11.3m high. Kit List		June 2022	22





Maximum / Practical No Persons permitted on Stair Tower = 22



Calculated Leg Load= 11.5 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.6 kN  
Max. Calc. Force A<sup>L</sup>: 4.7 kN  
Max. Calc. Tube Axial Force: 5.3 kN

**Netted Scaffold (<0.6cf<sub>L</sub>)\***

Max. Calc. Force All : 3.1 kN  
Max. Calc. Force A<sup>L</sup>: 5.6 kN  
Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>L</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1320 kg




**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 12.3 m  
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

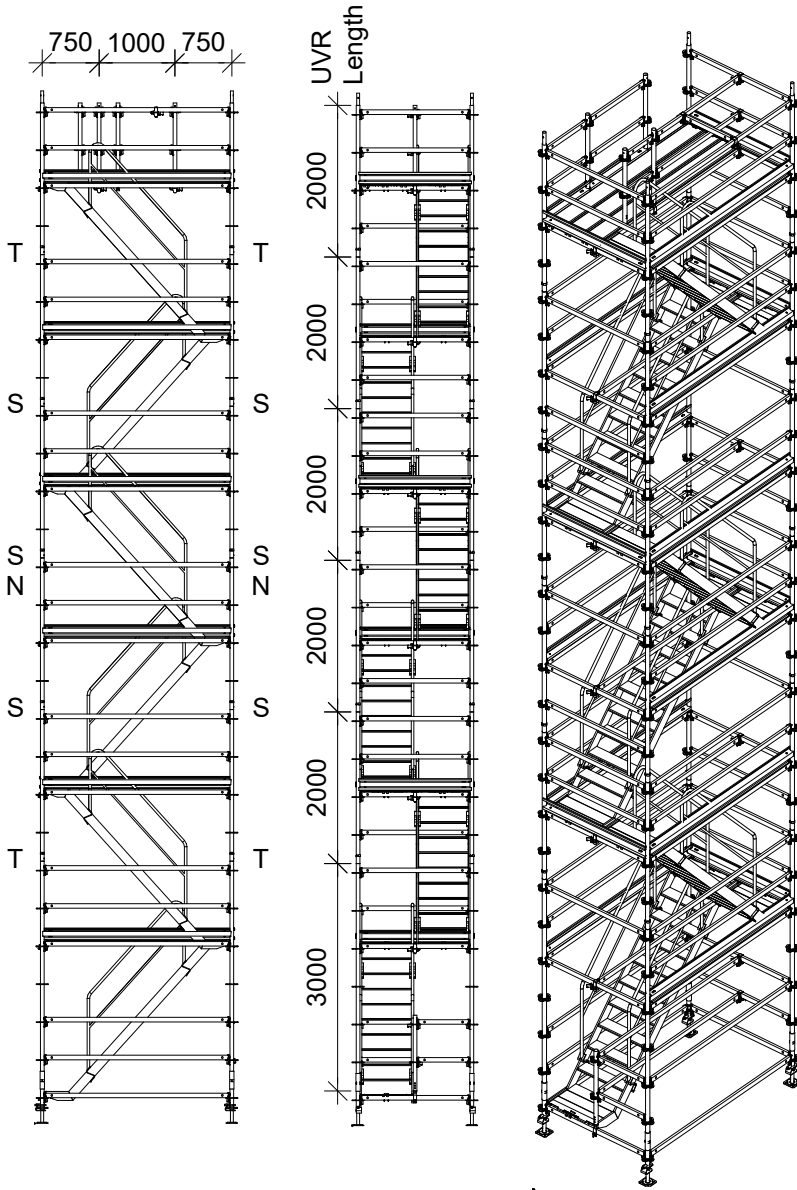

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company			
Project			
Subject	PERI UP Flex Staircase 75	System Selected by	Date
	2.5m x 1.5m A/t 12.3m high		June 2022
			Sheet 23

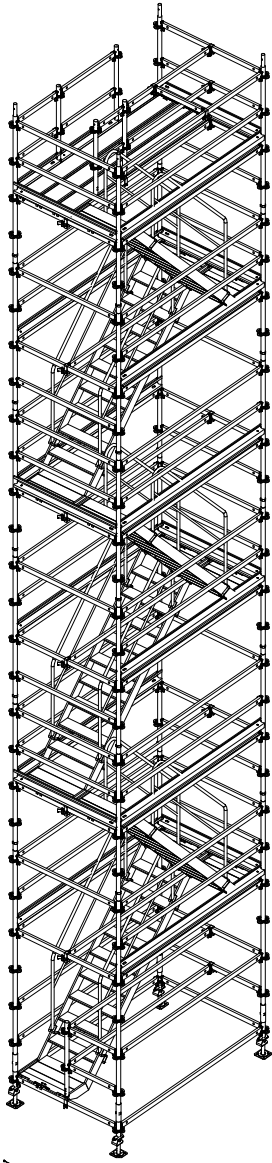

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	24	PC	0.06	1.42
100009	Standard UVR 200	20	PC	10.00	200.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	42	PC	4.72	198.24
114648	Ledger UH 250 Plus	47	PC	7.36	345.92
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111117	Staircase UAS 75 x 250/200, Alu	6	PC	28.00	168.00
100742	Stair Guardrail UAG	12	PC	10.00	120.00
110793	Ledger to Ledger Coupler UHA Half	18	PC	1.09	19.62
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	7	PC	2.99	20.93
110208	Toeboard Steel UPY 250	11	PC	5.06	55.66
<b>Total weight</b>				kg	<b>1,320.16</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 12.3m high. Kit List		June 2022	24



Maximum / Practical No Persons permitted on Stair Tower = 22



Calculated Leg Load= 12.0 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.6 kN  
Max. Calc. Force A<sup>L</sup>: 4.7 kN  
Max. Calc. Tube Axial Force: 5.3 kN

**Netted Scaffold (<0.6cf<sub>L</sub>)\***

Max. Calc. Force All : 2.4 kN  
Max. Calc. Force A<sup>L</sup>: 4.2 kN  
Max. Calc. Tube Axial Force: 4.8 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>L</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1580 kg




**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 12.3 m  
Lift Heights: 3.0 m



Scaffold placed Max 0.3m from the structure

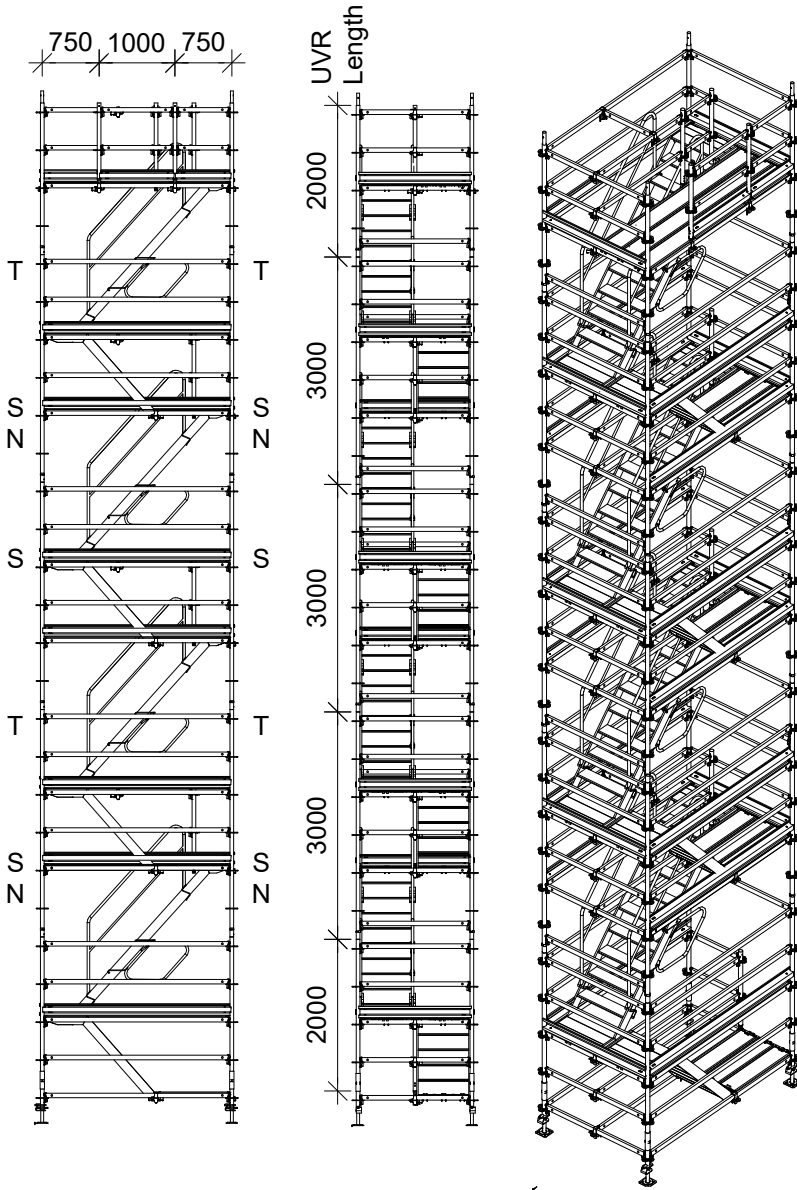

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 12.3m high. (3m lifts)		June 2022	25

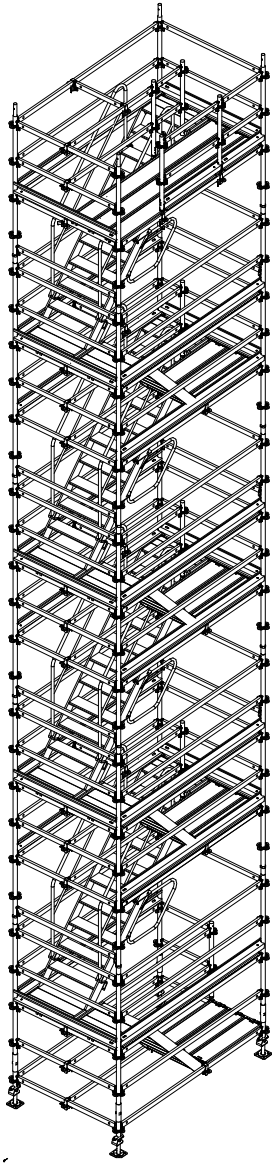

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	20	PC	0.06	1.18
100009	Standard UVR 200	8	PC	10.00	80.00
100012	Standard UVR 300	12	PC	14.70	176.40
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	8	PC	4.61	36.88
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	12	PC	2.73	32.76
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	49	PC	4.72	231.28
114645	Ledger UH 200 Plus	6	PC	6.04	36.24
114648	Ledger UH 250 Plus	51	PC	7.36	375.36
124118	Steel Deck UDG 25 x 100	12	PC	6.63	79.56
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	4	PC	17.90	71.60
111117	Staircase UAS 75 x 250/200, Alu	4	PC	28.00	112.00
100742	Stair Guardrail UAG	8	PC	10.00	80.00
133543	Stair Guardrail UAH-2	4	PC	4.51	18.04
110793	Ledger to Ledger Coupler UHA Half	35	PC	1.09	38.15
109764	UH Spigot	4	PC	1.25	5.00
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	9	PC	2.99	26.91
110208	Toeboard Steel UPY 250	15	PC	5.06	75.90
<b>Total weight</b>				kg	<b>1,571.53</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**


Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5 x 1.5m A/t 12.3m high.(3m lifts) Kit List		June 2022	26

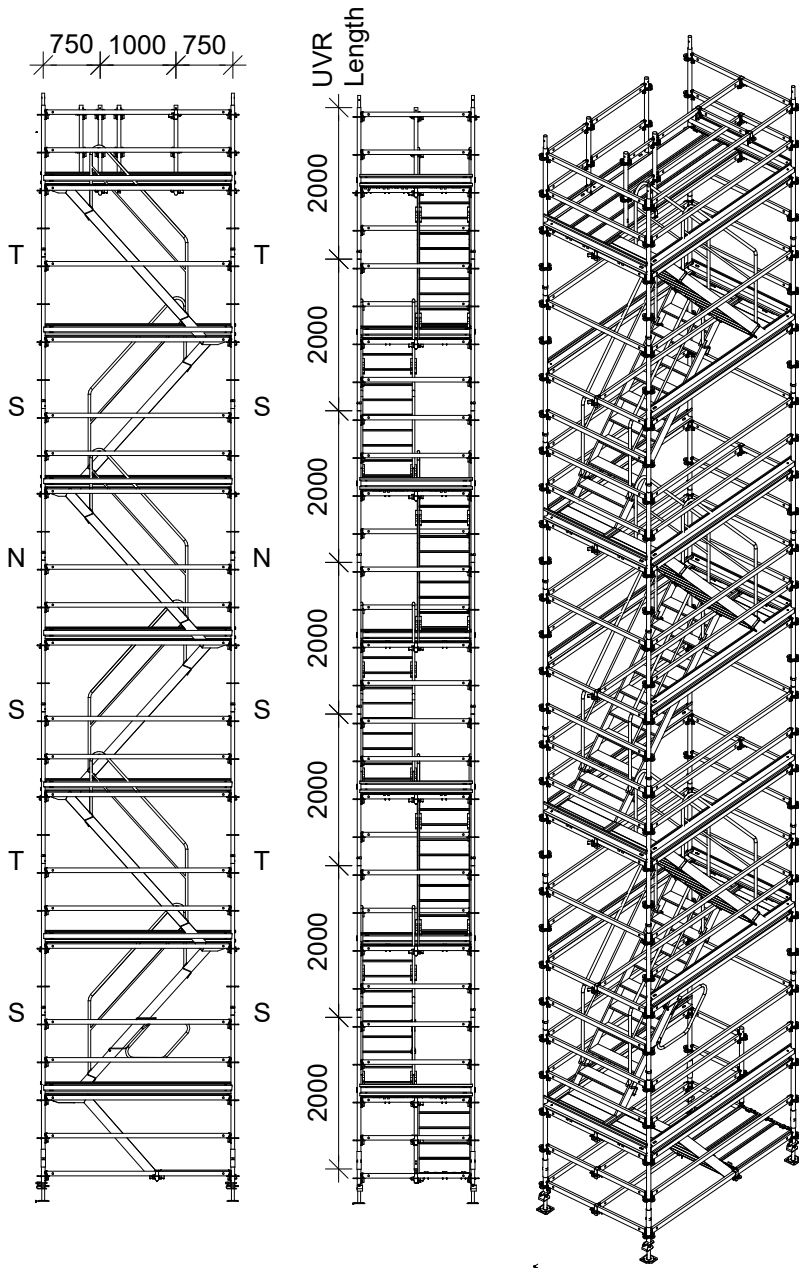

Maximum / Practical No Persons permitted on Stair Tower = 23



Calculated Leg Load = 12.5 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
 N = additional tying in for netted scaffold  
 S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.0 kN  
 Max. Calc. Force A<sup>L</sup>: 3.5 kN  
 Max. Calc. Tube Axial Force: 4.0 kN

**Netted Scaffold (<0.6cf1)\***

Max. Calc. Force All : 3.1 kN  
 Max. Calc. Force A<sup>L</sup>: 5.6 kN  
 Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
 Max. Calc. Force A<sup>L</sup>: 6.9 kN  
 Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
 60% open structure = Anchor load x 0.75  
 30% open structure = Anchor load x 0.50  
 Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1440 kg



**Stair tower Dim**

Tower Length: 2.5 m  
 Tower Depth: 1.5 m  
 Tower Height (deck level): 13.3 m  
 Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
 Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 13.3m high		June 2022	27

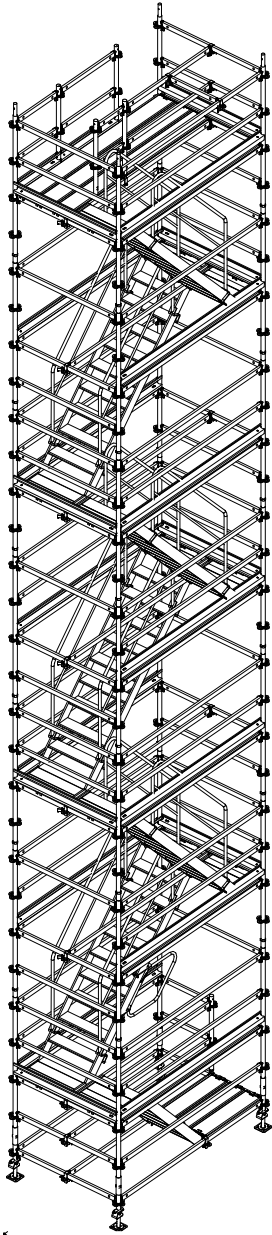

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	28	PC	0.06	1.65
100009	Standard UVR 200	28	PC	10.00	280.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	46	PC	4.72	217.12
114648	Ledger UH 250 Plus	49	PC	7.36	360.64
124118	Steel Deck UDG 25 x 100	3	PC	6.63	19.89
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111117	Staircase UAS 75 x 250/200, Alu	6	PC	28.00	168.00
100742	Stair Guardrail UAG	12	PC	10.00	120.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	21	PC	1.09	22.89
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	8	PC	2.99	23.92
110208	Toeboard Steel UPY 250	13	PC	5.06	65.78
<b>Total weight</b>			kg		<b>1,437.26</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**


Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 13.3m high. Kit List		June 2022	28

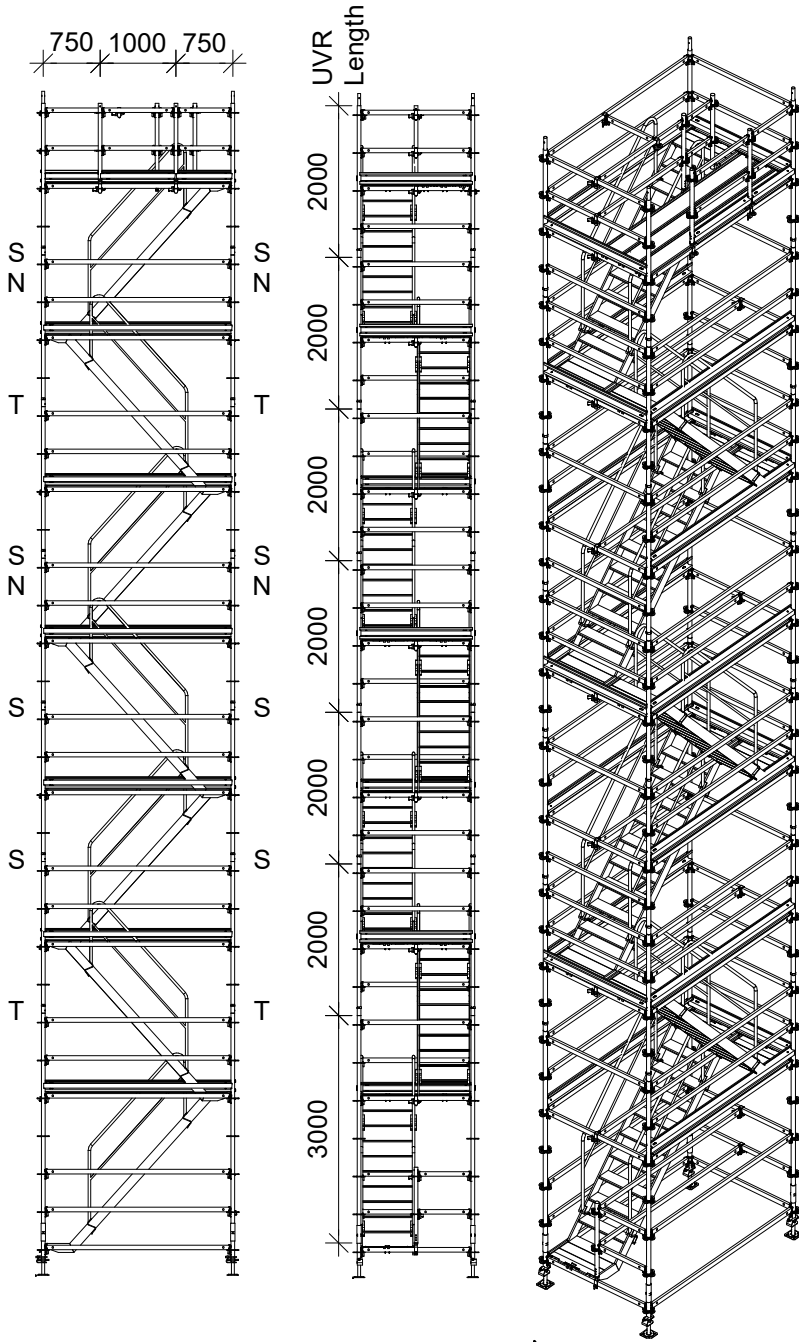

Maximum / Practical No Persons permitted on Stair Tower = 25



Calculated Leg Load = 13.0 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.6 kN  
Max. Calc. Force A<sup>⊥</sup>: 4.7 kN  
Max. Calc. Tube Axial Force: 5.3 kN

**Netted Scaffold (<0.6cf⊥)\***

Max. Calc. Force All : 3.1 kN  
Max. Calc. Force A<sup>⊥</sup>: 5.6 kN  
Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>⊥</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1510 kg



**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 14.3 m  
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company			
Project			
Subject	PERI UP Flex Staircase 75	System Selected by	Date
	2.5m x 1.5m A/t 14.3m high		June 2022
			Sheet
			29

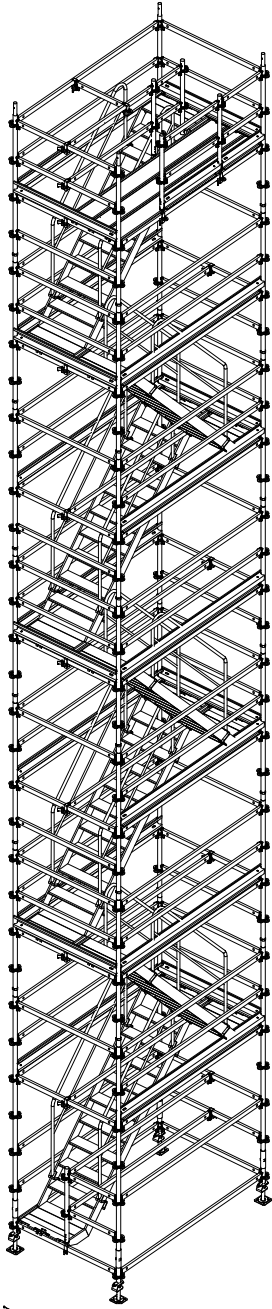

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	28	PC	0.06	1.65
100009	Standard UVR 200	24	PC	10.00	240.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	48	PC	4.72	226.56
114648	Ledger UH 250 Plus	54	PC	7.36	397.44
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111117	Staircase UAS 75 x 250/200, Alu	7	PC	28.00	196.00
100742	Stair Guardrail UAG	14	PC	10.00	140.00
110793	Ledger to Ledger Coupler UHA Half	20	PC	1.09	21.80
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	8	PC	2.99	23.92
110208	Toeboard Steel UPY 250	13	PC	5.06	65.78
<b>Total weight</b>				kg	<b>1,503.53</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN


Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 14.3m high. Kit List		June 2022	30



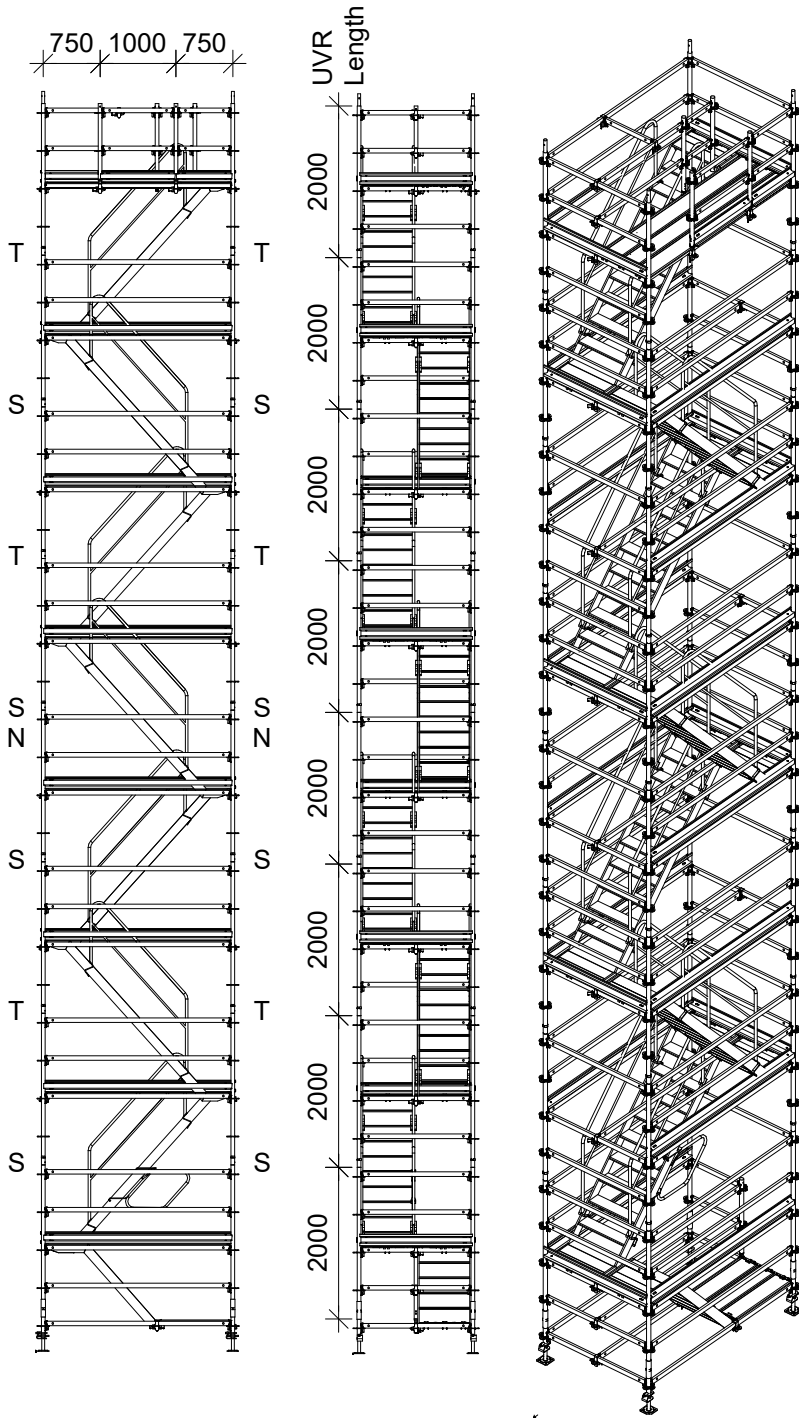

Maximum / Practical No Persons permitted on Stair Tower = 26



Calculated Leg Load= 14.0 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.0 kN  
Max. Calc. Force A<sup>⊥</sup>: 3.5 kN  
Max. Calc. Tube Axial Force: 4.0 kN

**Netted Scaffold (<0.6cf⊥)\***

Max. Calc. Force All : 3.1 kN  
Max. Calc. Force A<sup>⊥</sup>: 5.6 kN  
Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>⊥</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1630 kg



**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 15.3 m  
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company			
Project			
Subject	PERI UP Flex Staircase 75	System Selected by	Date
	2.5m x 1.5m A/t 15.3m high		June 2022
			Sheet
			31

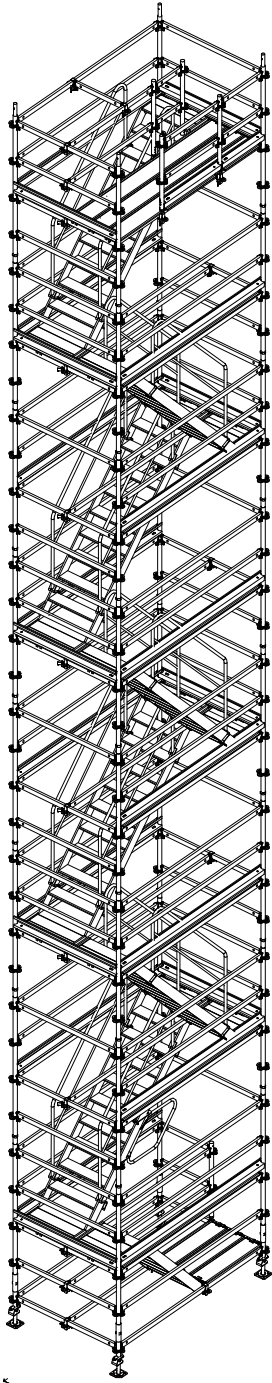

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	32	PC	0.06	1.89
100009	Standard UVR 200	32	PC	10.00	320.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	52	PC	4.72	245.44
114648	Ledger UH 250 Plus	57	PC	7.36	419.52
124118	Steel Deck UDG 25 x 100	3	PC	6.63	19.89
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111117	Staircase UAS 75 x 250/200, Alu	7	PC	28.00	196.00
100742	Stair Guardrail UAG	14	PC	10.00	140.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	23	PC	1.09	25.07
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	9	PC	2.99	26.91
110208	Toeboard Steel UPY 250	15	PC	5.06	75.90
<b>Total weight</b>				kg	<b>1,627.99</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

**Latest UK Edition**



**PERI Ltd.**


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 15.3m high Kit List		June 2022	32

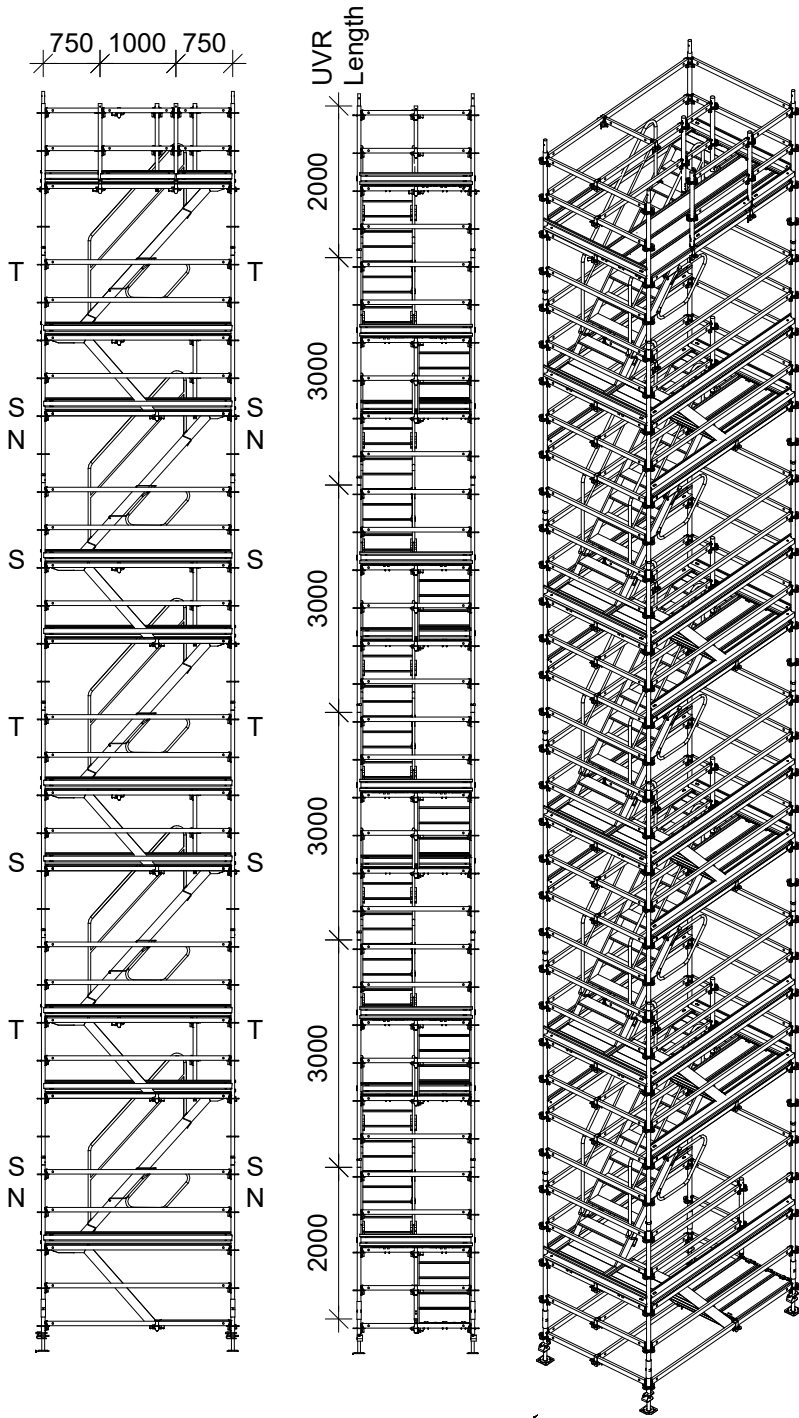

Maximum / Practical No Persons permitted on Stair Tower = 26



Calculated Leg Load= 14.0 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.6 kN  
Max. Calc. Force A<sup>L</sup>: 4.7 kN  
Max. Calc. Tube Axial Force: 5.3 kN

**Netted Scaffold (<0.6cf<sub>L</sub>)\***

Max. Calc. Force All : 2.4 kN  
Max. Calc. Force A<sup>L</sup>: 4.2 kN  
Max. Calc. Tube Axial Force: 4.8 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>L</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1940 kg



**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 15.3 m  
Lift Heights: 3.0 m



Scaffold placed Max 0.3m from the structure

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 15.3m high (3m lifts)		June 2022	33

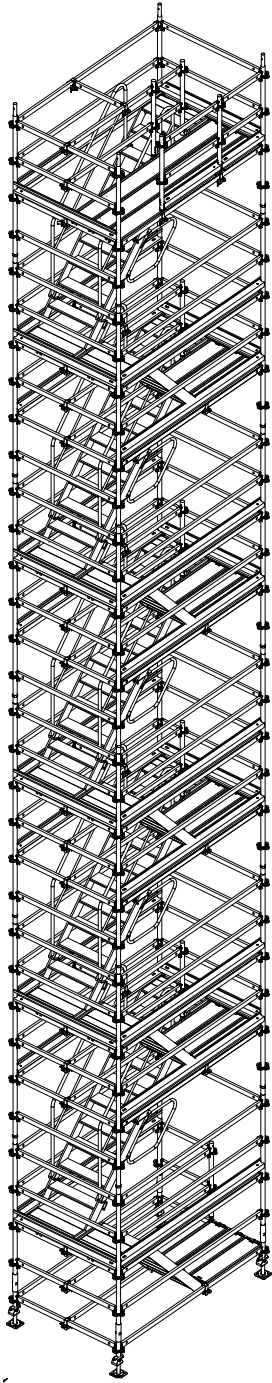

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	24	PC	0.06	1.42
100009	Standard UVR 200	8	PC	10.00	80.00
100012	Standard UVR 300	16	PC	14.70	235.20
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	9	PC	4.61	41.49
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	14	PC	2.73	38.22
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	60	PC	4.72	283.20
114645	Ledger UH 200 Plus	8	PC	6.04	48.32
114648	Ledger UH 250 Plus	65	PC	7.36	478.40
124118	Steel Deck UDG 25 x 100	15	PC	6.63	99.45
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	5	PC	17.90	89.50
111117	Staircase UAS 75 x 250/200, Alu	5	PC	28.00	140.00
100742	Stair Guardrail UAG	10	PC	10.00	100.00
133543	Stair Guardrail UAH-2	5	PC	4.51	22.55
110793	Ledger to Ledger Coupler UHA Half	43	PC	1.09	46.87
109764	UH Spigot	5	PC	1.25	6.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	11	PC	2.99	32.89
110208	Toeboard Steel UPY 250	19	PC	5.06	96.14
Total weight				kg	1,934.17

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**


Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5 x 1.5m A/t 15.3m high(3m lifts) Kit List		June 2022	34

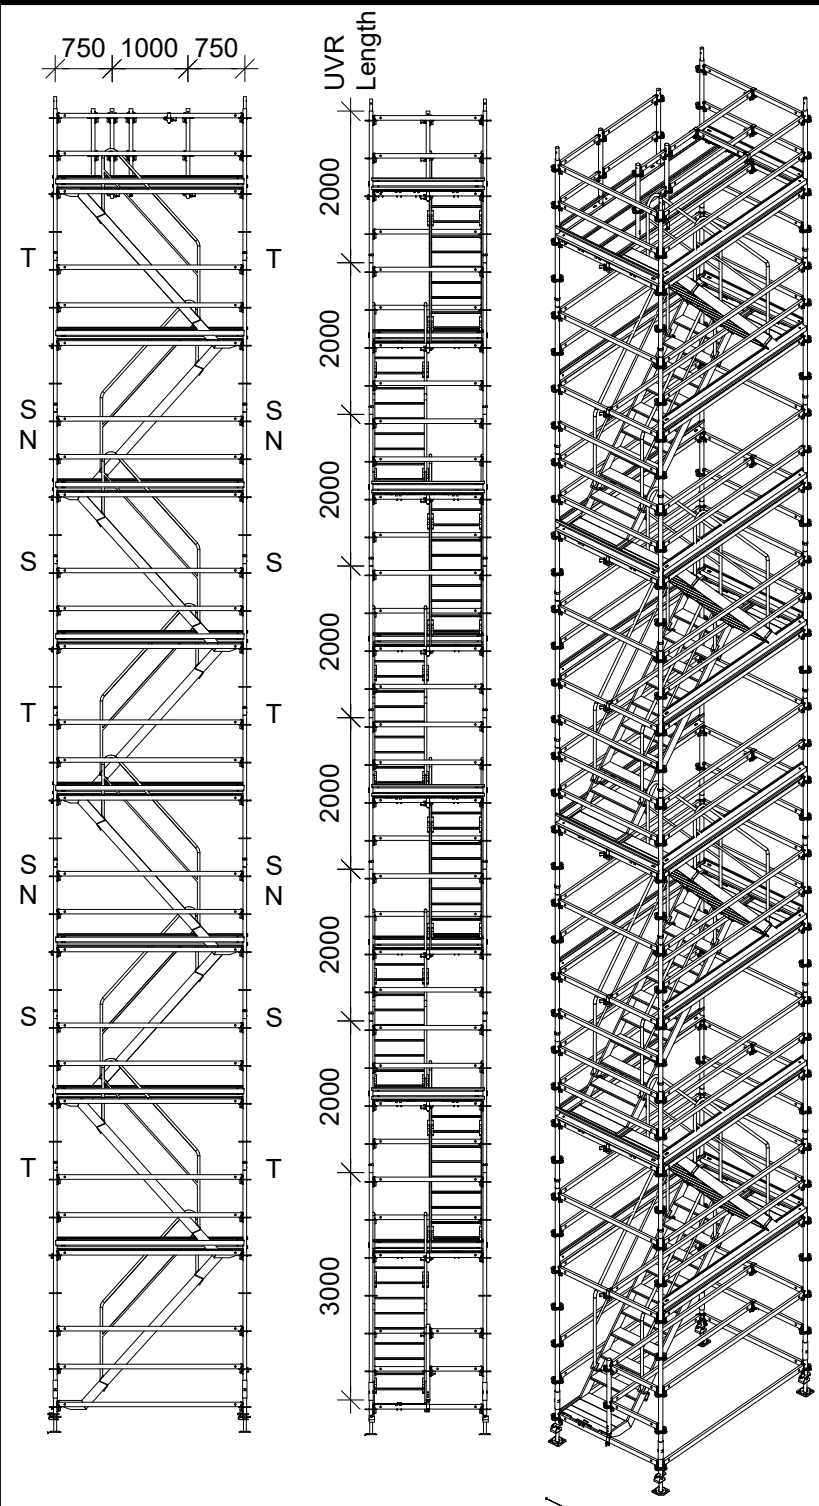

Maximum / Practical No Persons permitted on Stair Tower = 28



Calculated Leg Load= 14.5 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
 N = additional tying in for netted scaffold  
 S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.0 kN  
 Max. Calc. Force A<sup>⊥</sup>: 3.5 kN  
 Max. Calc. Tube Axial Force: 4.0 kN

**Netted Scaffold (<0.6cfL)\***

Max. Calc. Force All : 3.1 kN  
 Max. Calc. Force A<sup>⊥</sup>: 5.6 kN  
 Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
 Max. Calc. Force A<sup>⊥</sup>: 6.9 kN  
 Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
 60% open structure = Anchor load x 0.75  
 30% open structure = Anchor load x 0.50  
 Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1690 kg



**Stair tower Dim**

Tower Length: 2.5 m  
 Tower Depth: 1.5 m  
 Tower Height (deck level): 16.3 m  
 Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
 Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 16.3m high		June 2022	35

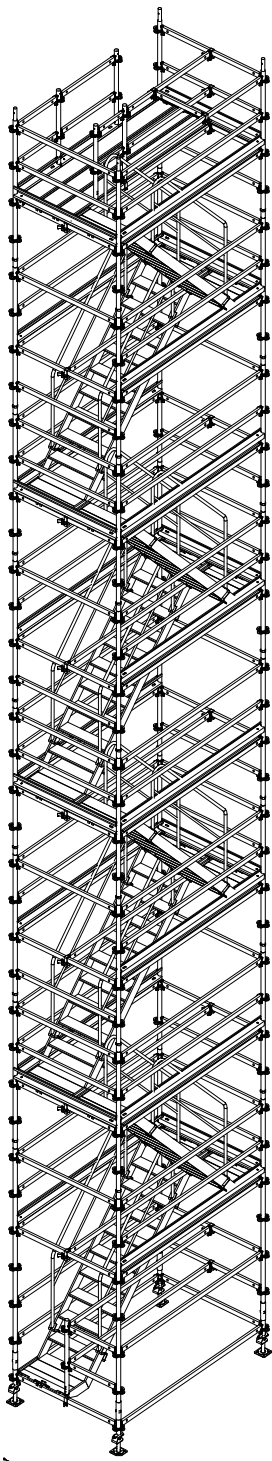

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	32	PC	0.06	1.89
100009	Standard UVR 200	28	PC	10.00	280.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	54	PC	4.72	254.88
114648	Ledger UH 250 Plus	61	PC	7.36	448.96
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111117	Staircase UAS 75 x 250/200, Alu	8	PC	28.00	224.00
100742	Stair Guardrail UAG	16	PC	10.00	160.00
110793	Ledger to Ledger Coupler UHA Half	22	PC	1.09	23.98
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	9	PC	2.99	26.91
110208	Toeboard Steel UPY 250	15	PC	5.06	75.90
<b>Total weight</b>				kg	<b>1,686.90</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

**Latest UK Edition**



**PERI Ltd.**


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5 x 1.5m A/t 16.3m high. Kit List		June 2022	36

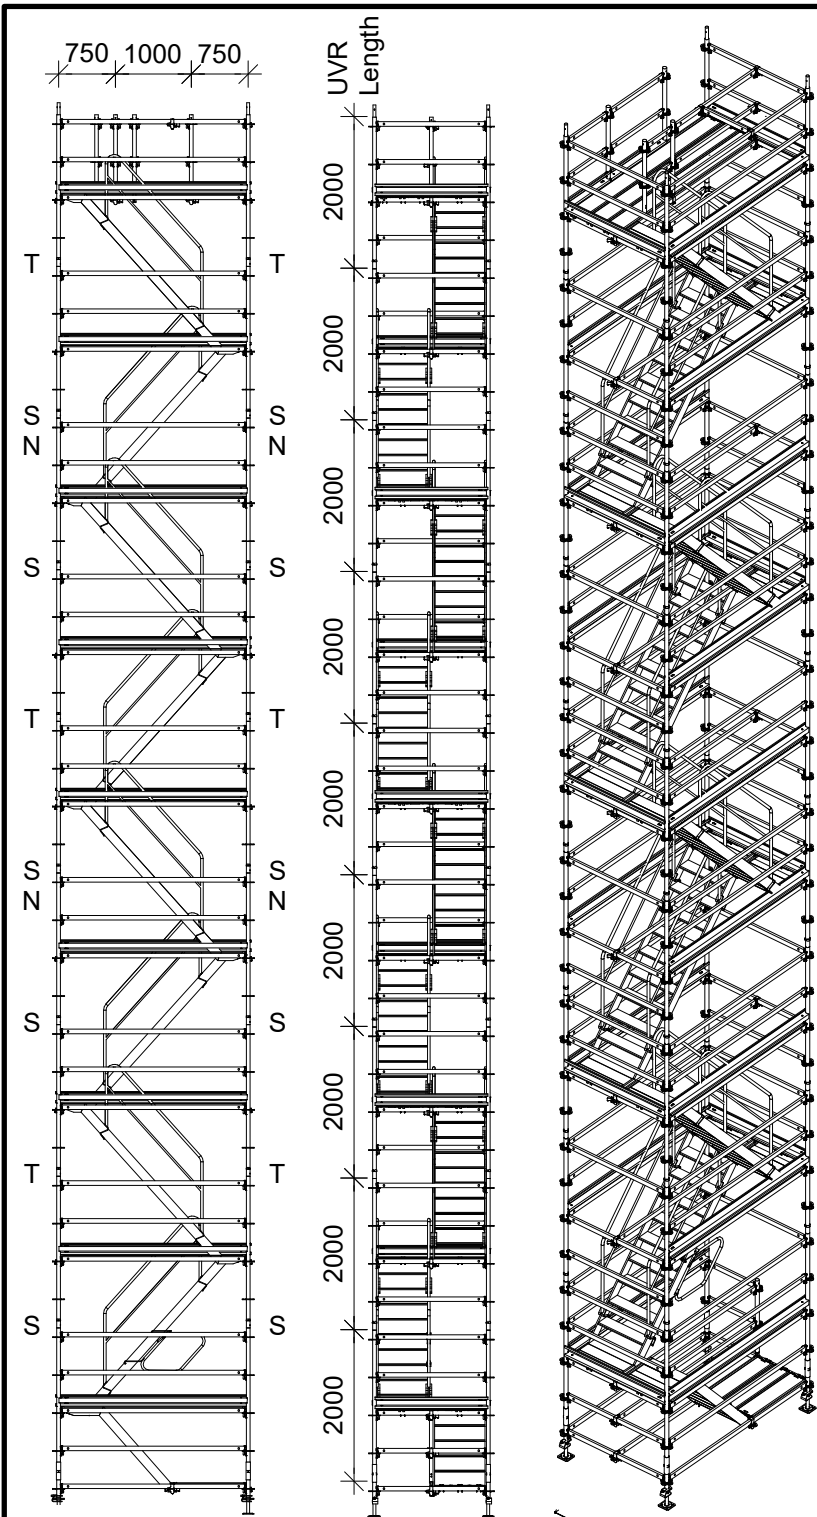

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



Maximum / Practical No Persons permitted on Stair Tower = 29



Calculated Leg Load= 15.5 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
 N = additional tying in for netted scaffold  
 S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.6 kN  
 Max. Calc. Force A<sup>⊥</sup>: 4.7 kN  
 Max. Calc. Tube Axial Force: 5.3 kN

**Netted Scaffold (<0.6cf⊥)\***

Max. Calc. Force All : 3.1 kN  
 Max. Calc. Force A<sup>⊥</sup>: 5.6 kN  
 Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
 Max. Calc. Force A<sup>⊥</sup>: 6.9 kN  
 Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
 60% open structure = Anchor load x 0.75  
 30% open structure = Anchor load x 0.50  
 Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1830 kg



**Stair tower Dim**

Tower Length: 2.5 m  
 Tower Depth: 1.5 m  
 Tower Height (deck level): 17.3 m  
 Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure



PERI Ltd.


Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company			
Project			
Subject	PERI UP Flex Staircase 75	System Selected by	Date
	2.5m x 1.5m A/t 17.3m high		June 2022
			Sheet
			37

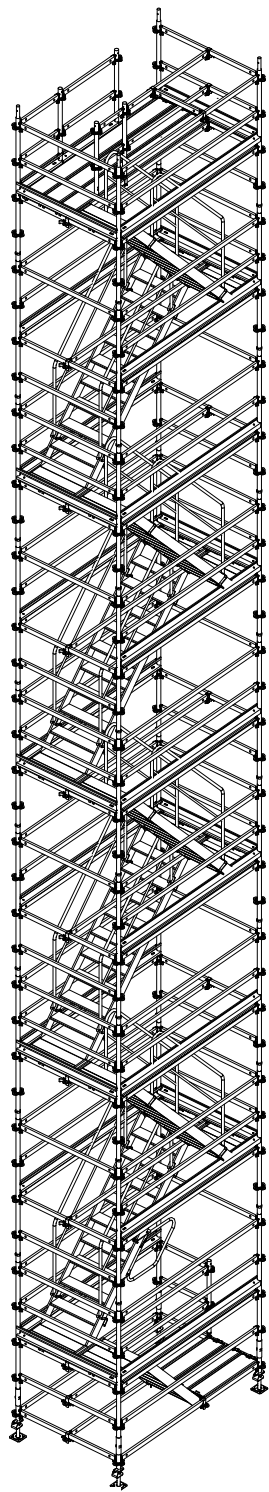

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	36	PC	0.06	2.12
100009	Standard UVR 200	36	PC	10.00	360.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	58	PC	4.72	273.76
114648	Ledger UH 250 Plus	66	PC	7.36	485.76
124118	Steel Deck UDG 25 x 100	3	PC	6.63	19.89
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111117	Staircase UAS 75 x 250/200, Alu	8	PC	28.00	224.00
100742	Stair Guardrail UAG	16	PC	10.00	160.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	25	PC	1.09	27.25
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	10	PC	2.99	29.90
110208	Toeboard Steel UPY 250	17	PC	5.06	86.02
<b>Total weight</b>				kg	<b>1,826.08</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN


Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 17.3m high. Kit List		June 2022	38



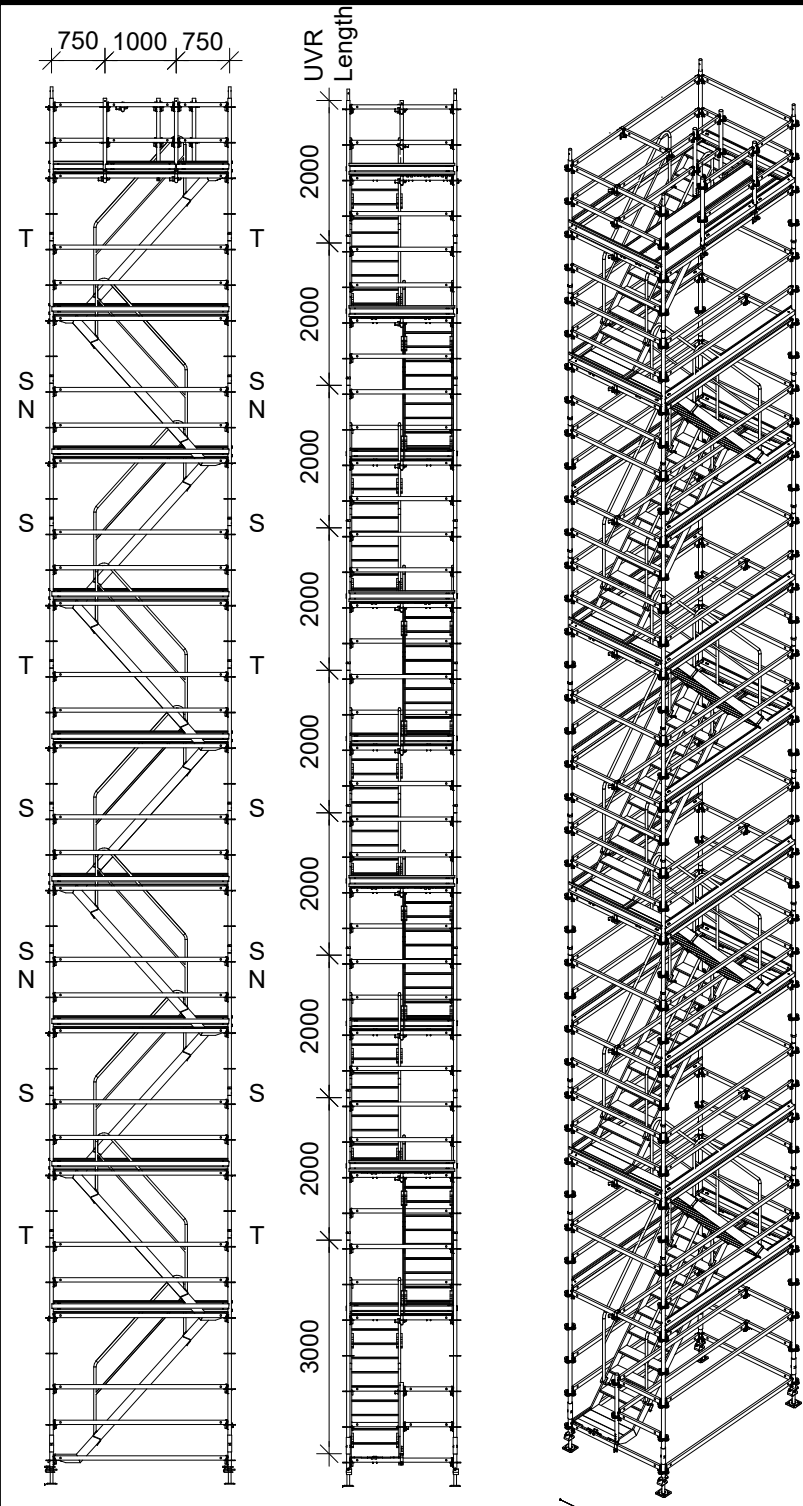

Maximum / Practical No Persons permitted on Stair Tower = 31



Calculated Leg Load= 16.0 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
 N = additional tying in for netted scaffold  
 S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***  
 Max. Calc. Force All : 2.6 kN  
 Max. Calc. Force A<sup>L</sup>: 4.7 kN  
 Max. Calc. Tube Axial Force: 5.3 kN

**Netted Scaffold (<0.6cf<sub>L</sub>)\***  
 Max. Calc. Force All : 3.1 kN  
 Max. Calc. Force A<sup>L</sup>: 5.6 kN  
 Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**  
 Max. Calc. Force All : 3.8 kN  
 Max. Calc. Force A<sup>L</sup>: 6.9 kN  
 Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
 60% open structure = Anchor load x 0.75  
 30% open structure = Anchor load x 0.50  
 Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1870 kg



**Stair tower Dim**  
 Tower Length: 2.5 m  
 Tower Depth: 1.5 m  
 Tower Height (deck level): 18.3 m  
 Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
 Latest UK Edition




PERI Ltd.  
 Clifton Upon Dunsmore Phone: 01788861600  
 Rugby  
 Warwickshire CV23 0AN

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 18.3m high		June 2022	39

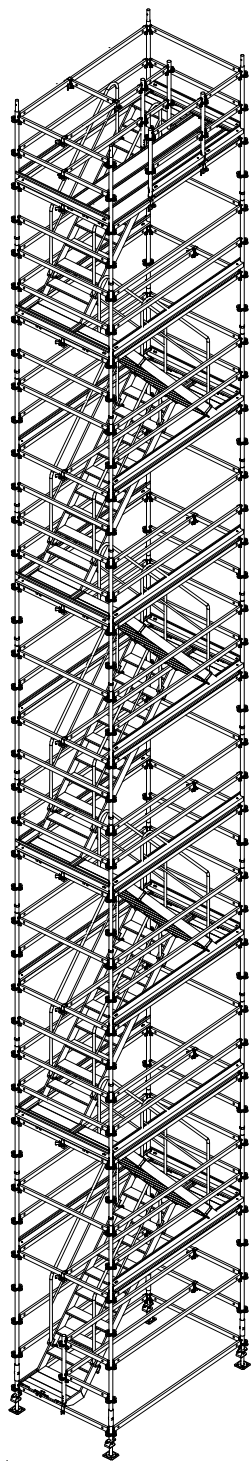

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	36	PC	0.06	2.12
100009	Standard UVR 200	32	PC	10.00	320.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	60	PC	4.72	283.20
114648	Ledger UH 250 Plus	68	PC	7.36	500.48
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111117	Staircase UAS 75 x 250/200, Alu	9	PC	28.00	252.00
100742	Stair Guardrail UAG	18	PC	10.00	180.00
110793	Ledger to Ledger Coupler UHA Half	24	PC	1.09	26.16
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	10	PC	2.99	29.90
110208	Toeboard Steel UPY 250	17	PC	5.06	86.02
<b>Total weight</b>			kg		<b>1,870.27</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

**Latest UK Edition**



**PERI Ltd.**



Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 18.3m high. Kit List		June 2022	40

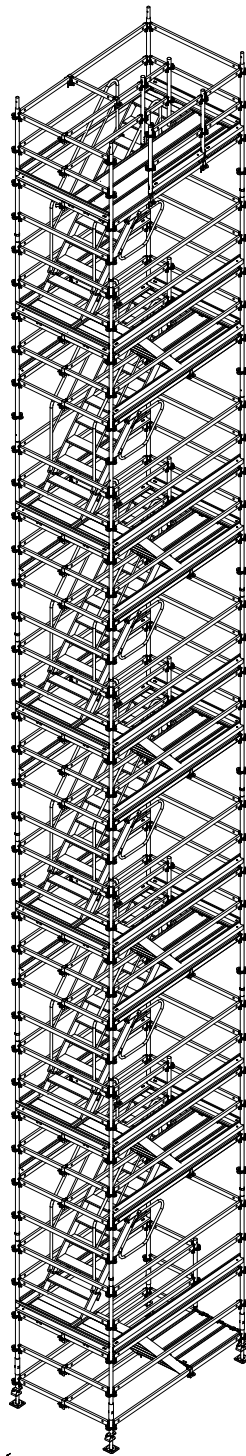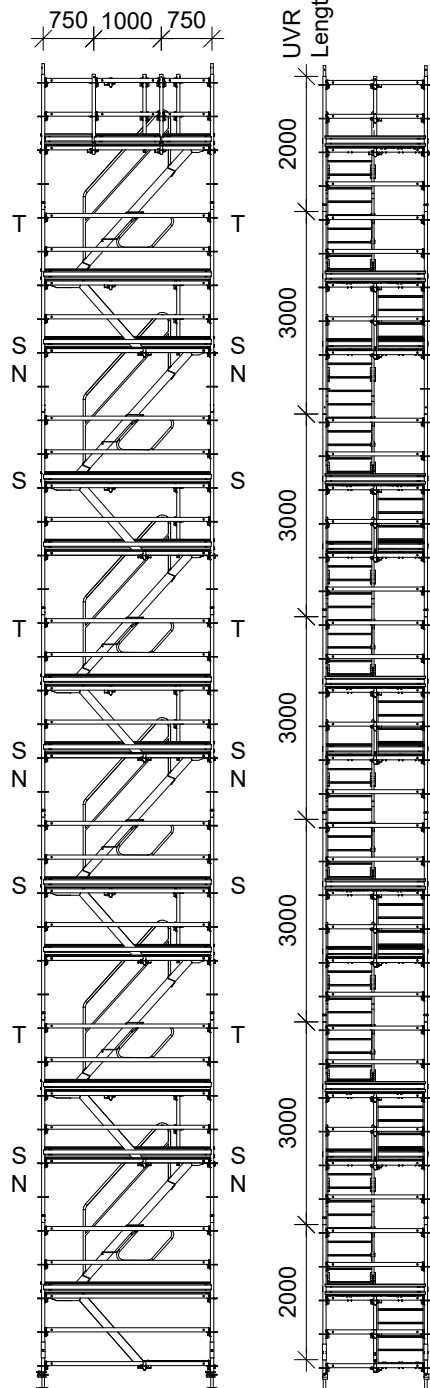

Maximum / Practical No Persons permitted on Stair Tower = 30



Calculated Leg Load = 16.3 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
N = additional tying in for netted scaffold  
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 1.3 kN  
Max. Calc. Force A<sup>L</sup>: 2.3 kN  
Max. Calc. Tube Axial Force: 5.3 kN

**Netted Scaffold (<0.6cf<sub>L</sub>)\***

Max. Calc. Force All : 2.4 kN  
Max. Calc. Force A<sup>L</sup>: 4.2 kN  
Max. Calc. Tube Axial Force: 4.8 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
Max. Calc. Force A<sup>L</sup>: 6.9 kN  
Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
60% open structure = Anchor load x 0.75  
30% open structure = Anchor load x 0.50  
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 2280 kg



**Stair tower Dim**

Tower Length: 2.5 m  
Tower Depth: 1.5 m  
Tower Height (deck level): 18.3 m  
Lift Heights: 3.0 m



Scaffold placed Max 0.3m from the structure

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company			
Project			
Subject	PERI UP Flex Staircase 75	System Selected by	Date
	2.5m x 1.5m A/t 18.3m high (3m lifts)		June 2022
			Sheet 41

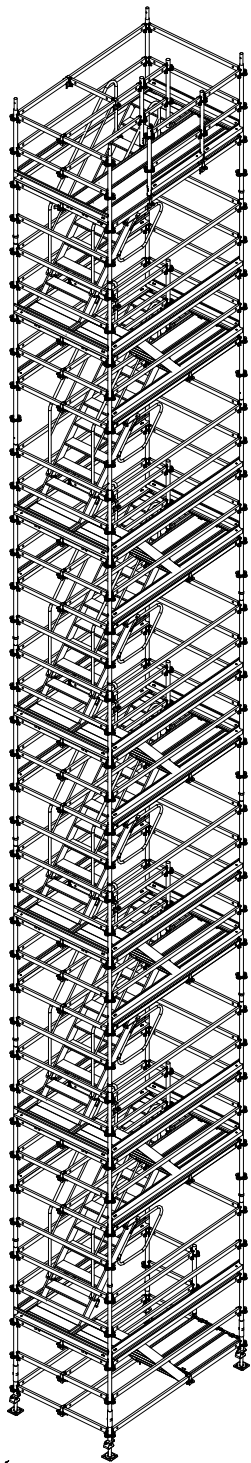

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	24	PC	0.06	1.42
100009	Standard UVR 200	8	PC	10.00	80.00
100012	Standard UVR 300	20	PC	14.70	294.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	10	PC	4.61	46.10
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	16	PC	2.73	43.68
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	70	PC	4.72	330.40
114645	Ledger UH 200 Plus	10	PC	6.04	60.40
114648	Ledger UH 250 Plus	77	PC	7.36	566.72
124118	Steel Deck UDG 25 x 100	18	PC	6.63	119.34
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	6	PC	17.90	107.40
111117	Staircase UAS 75 x 250/200, Alu	6	PC	28.00	168.00
100742	Stair Guardrail UAG	12	PC	10.00	120.00
133543	Stair Guardrail UAH-2	6	PC	4.51	27.06
110793	Ledger to Ledger Coupler UHA Half	51	PC	1.09	55.59
109764	UH Spigot	6	PC	1.25	7.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	13	PC	2.99	38.87
110208	Toeboard Steel UPY 250	23	PC	5.06	116.38
<b>Total weight</b>				kg	<b>2,277.13</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration  
**Latest UK Edition**



**PERI Ltd.**


Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5 x 1.5m A/t 18.3m high(3m lifts) Kit List		June 2022	42

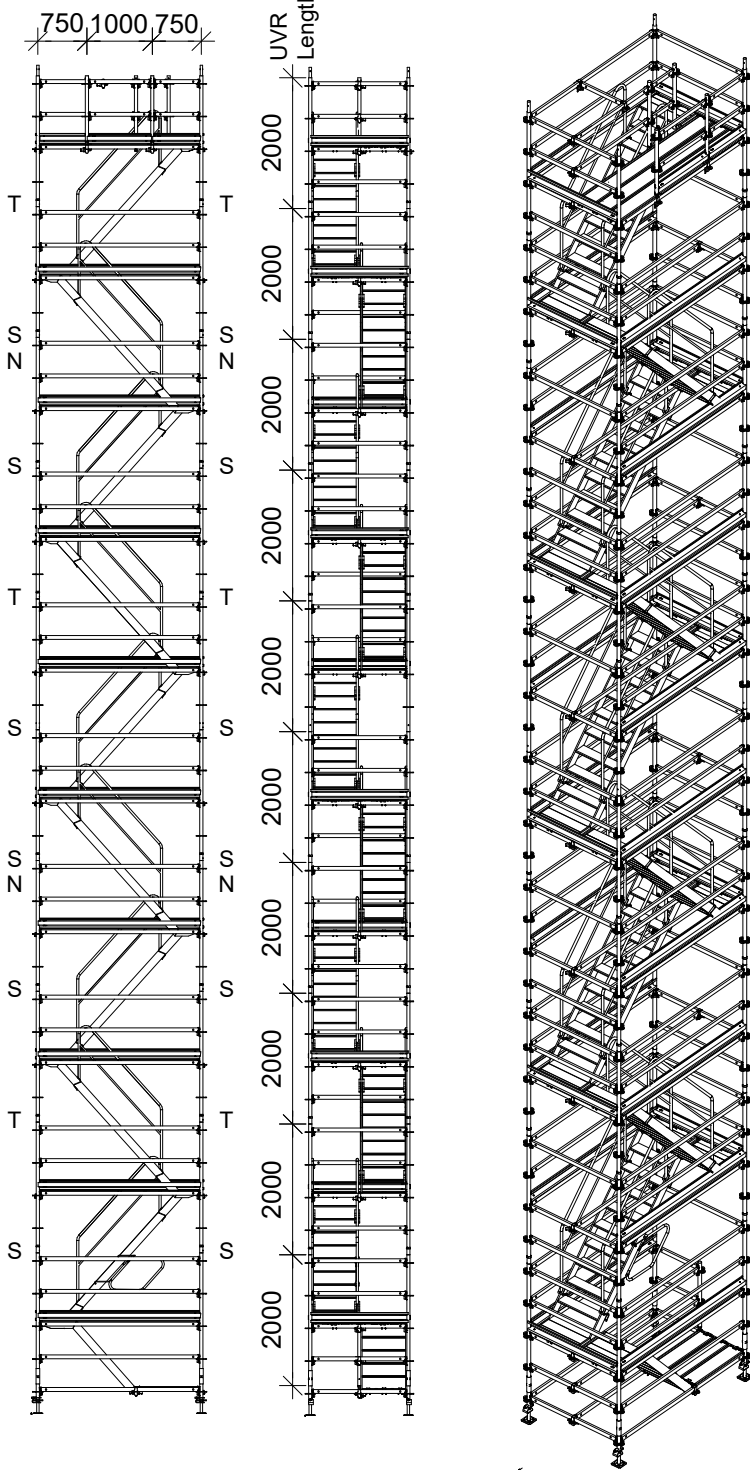

Maximum / Practical No Persons permitted on Stair Tower = 32



Calculated Leg Load = 17.0 kN



Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>



T = Tying in position  
 N = additional tying in for netted scaffold  
 S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All : 2.6 kN  
 Max. Calc. Force A<sup>⊥</sup>: 4.7 kN  
 Max. Calc. Tube Axial Force: 5.3 kN

**Netted Scaffold (<0.6cf<sub>L</sub>)\***

Max. Calc. Force All : 3.1 kN  
 Max. Calc. Force A<sup>⊥</sup>: 5.6 kN  
 Max. Calc. Tube Axial Force: 6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All : 3.8 kN  
 Max. Calc. Force A<sup>⊥</sup>: 6.9 kN  
 Max. Calc. Tube Axial Force: 7.8 kN

\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
 60% open structure = Anchor load x 0.75  
 30% open structure = Anchor load x 0.50  
 Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 2010 kg



**Stair tower Dim**

Tower Length: 2.5 m  
 Tower Depth: 1.5 m  
 Tower Height (deck level): 19.3 m  
 Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

**PERI UP Flex Stairs 75**

Instruction for Assembly and Use - Standard Configuration  
 Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company			
Project			
Subject	PERI UP Flex Staircase 75	System Selected by	Date
	2.5m x 1.5m A/t 19.3m high		June 2022
			Sheet 43

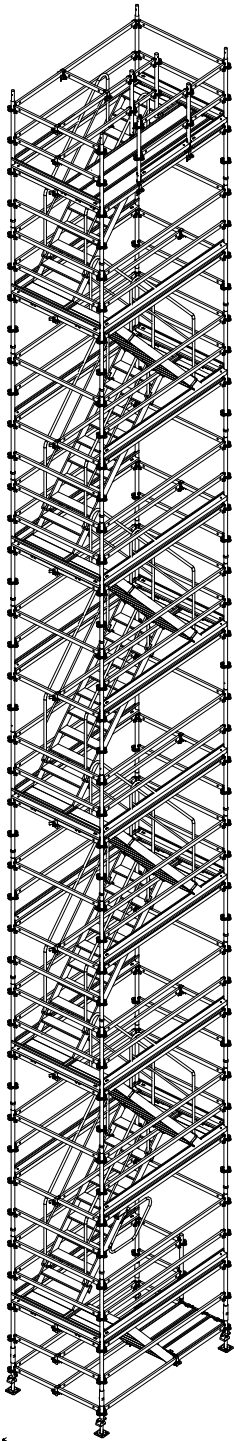

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	36	PC	0.06	2.12
100009	Standard UVR 200	40	PC	10.00	400.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	63	PC	4.72	297.36
114648	Ledger UH 250 Plus	73	PC	7.36	537.28
124118	Steel Deck UDG 25 x 100	3	PC	6.63	19.89
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111117	Staircase UAS 75 x 250/200, Alu	9	PC	28.00	252.00
100742	Stair Guardrail UAG	18	PC	10.00	180.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	27	PC	1.09	29.43
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	11	PC	2.99	32.89
110208	Toeboard Steel UPY 250	19	PC	5.06	96.14
<b>Total weight</b>			kg		<b>2,004.49</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

**Latest UK Edition**



**PERI Ltd.**


Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600





Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent
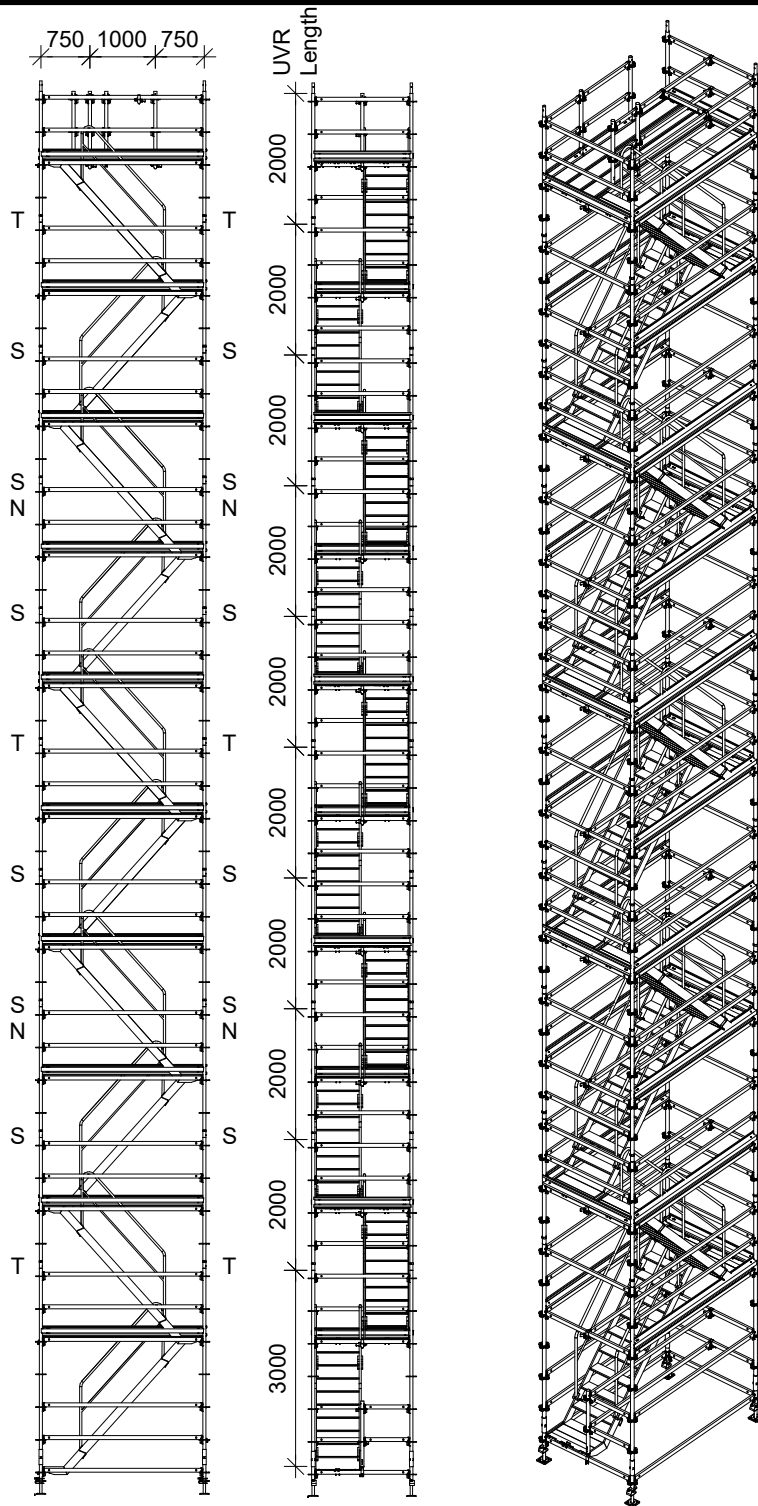
### PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 19.3m high. Kit List		June 2022	44



**PERI UP Flex Stairs 75**  
 Instruction for Assembly and Use - Standard Configuration  
 Latest UK Edition

-  Maximum / Practical No Persons permitted on Stair Tower = 34
-  Calculated Leg Load= 17.5 kN
-  Dynamic Wind Pressure: 0.50 kN/m<sup>2</sup>
-  T = Tying in position  
 N = additional tying in for netted scaffold  
 S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

**Unclad Scaffold\***

Max. Calc. Force All :	2.6 kN
Max. Calc. Force A <sup>L</sup> :	4.7 kN
Max. Calc. Tube Axial Force:	5.3 kN

**Netted Scaffold (<0.6cfL)\***


Max. Calc. Force All :	3.1 kN
Max. Calc. Force A <sup>L</sup> :	5.6 kN
Max. Calc. Tube Axial Force:	6.4 kN

**Sheeted Scaffold**

Max. Calc. Force All :	3.8 kN
Max. Calc. Force A <sup>L</sup> :	6.9 kN
Max. Calc. Tube Axial Force:	7.8 kN


\*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:  
 60% open structure = Anchor load x 0.75  
 30% open structure = Anchor load x 0.50  
 Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram

 Maximum calculated Stair Tower PERI UP weight (unfactored) = 2060 kg

**Stair tower Dim**

Tower Length:	2.5 m
Tower Depth:	1.5 m
Tower Height (deck level):	20.3 m
Lift Heights:	2.0 m

 Scaffold placed Max 0.3m from the structure




**PERI Ltd.**  
 Clifton Upon Dunsmore Phone: 01788861600  
 Rugby  
 Warwickshire CV23 0AN

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 20.3m high		June 2022	45

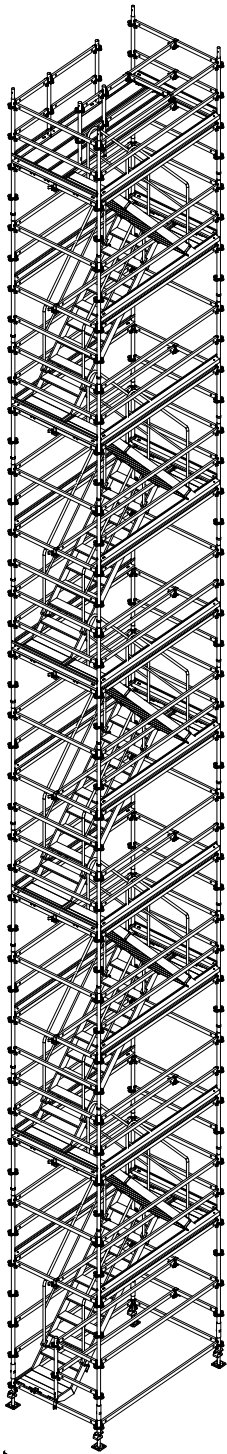

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	40	PC	0.06	2.36
100009	Standard UVR 200	36	PC	10.00	360.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114595	Ledger UH 50 Plus	2	PC	2.07	4.14
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114632	Ledger UH 100 Plus	2	PC	4.39	8.78
114641	Ledger UH 150 Plus	66	PC	4.72	311.52
114648	Ledger UH 250 Plus	75	PC	7.36	552.00
123771	Steel Deck UDG 25 x 250	3	PC	14.90	44.70
111117	Staircase UAS 75 x 250/200, Alu	10	PC	28.00	280.00
100742	Stair Guardrail UAG	20	PC	10.00	200.00
110793	Ledger to Ledger Coupler UHA Half	26	PC	1.09	28.34
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110073	Toeboard Steel UPY 100	1	PC	1.96	1.96
110160	Toeboard Steel UPY 150	11	PC	2.99	32.89
110208	Toeboard Steel UPY 250	19	PC	5.06	96.14
<b>Total weight</b>			kg		<b>2,053.64</b>

*Bins and Pallets are not included in the material list.*

## PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

**Latest UK Edition**



**PERI Ltd.**

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN


Phone: 01788861600  
Fax: 01788861610

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

### PERI UP STAIR TOWERS COMPLIANCE SHEET


Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	2.5m x 1.5m A/t 20.3m high. Kit List		June 2022	46



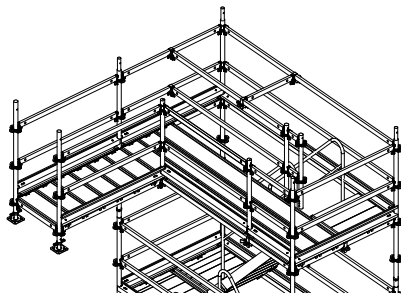


**Flat Run-off at the top**

If assembled, consider:  
 + 89 kg Self Weight  
 +1.57 kN extra Led Load

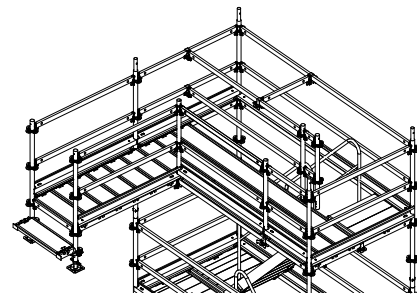


**-0.25m Run-off at the top**

If assembled, consider:  
 + 101 kg Self Weight  
 +1.82 kN Leg Load

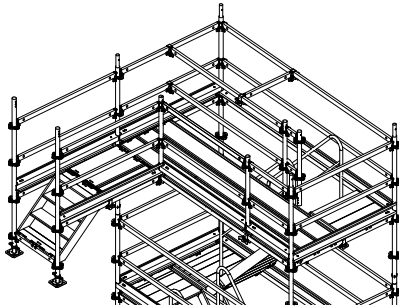


**-0.50m Run-off at the top**

If assembled, consider:  
 + 94 kg Self Weight  
 +1.75 kN Leg Load

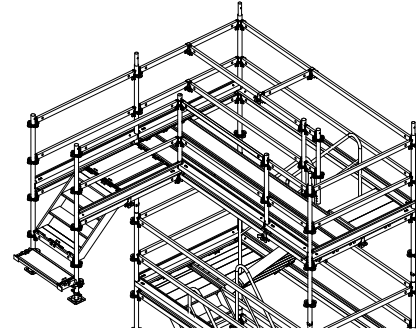

**-0.75m Run-off at the top**

If assembled, consider:  
 + 105 kg Self Weight  
 +1.92 kN Led Load

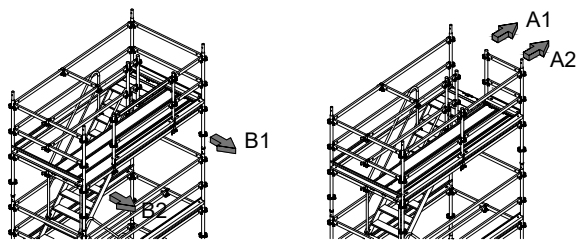


**Possible Run-off Configurations**

Anchor Bolt Fixing  
 (PERI Anchor Bolt14/20 x 130  
 or by Client)

Brace Connector HDR-2

Scaffold Tube connected  
 to vertical Standard



Base  
 Plate-2  
 for RSS

**Note!**

The client is responsible for ensuring proper transmission of all stated reactions into the supporting structure. Reactions are based on permissible stress design and are unfactored.

**Scaffold Anchor Detail**

( Use With Base Plate-2 For RSS )



**PERI Ltd.**


Clifton Upon Dunsmore  
 Rugby  
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent


**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company			
Project			
Subject	PERI UP Flex Staircase 75	System Selected by	Date
	Run-off Configurations. Details		June 2022
			Sheet 47

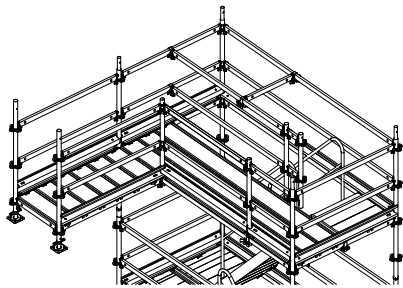


**Flat Run-off at the top**

FLAT RUN-OFF						
Art No	Article description	Qty	Unit	Weight	Σ Weight	
100411	Adj. Base Plate UJB 38-50/30	2	PC	3.39	6.78	
100003	Top Standard UVH 150	2	PC	6.92	13.84	
114629	Ledger UH 75 Plus	1	PC	2.73	2.73	
114641	Ledger UH 150 Plus	6	PC	4.72	28.32	
124121	Steel Deck UDG 25 x 75	6	PC	5.26	31.56	
110160	Toeboard Steel UPY 150	2	PC	2.99	5.98	
Total weight			kg		89.21	

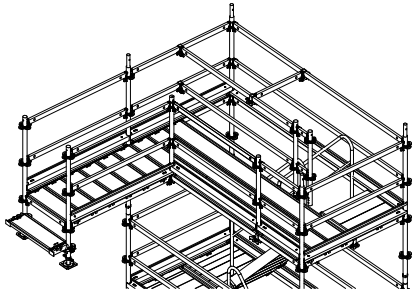


**-0.25m Run-off at the top**

-0.25m RUN-OFF						
Art No	Article description	Qty	Unit	Weight	Σ Weight	
100411	Adj. Base Plate UJB 38-50/30	2	PC	3.39	6.78	
116306	Rosett Coupler UEV 180°	2	PC	1.70	3.40	
100003	Top Standard UVH 150	2	PC	6.92	13.84	
114629	Ledger UH 75 Plus	1	PC	2.73	2.73	
114641	Ledger UH 150 Plus	6	PC	4.72	28.32	
124121	Steel Deck UDG 25 x 75	7	PC	5.26	36.82	
110160	Toeboard Steel UPY 150	2	PC	2.99	5.98	
115959	Support UC 25	2	PC	1.16	2.32	
Total weight			kg		100.19	

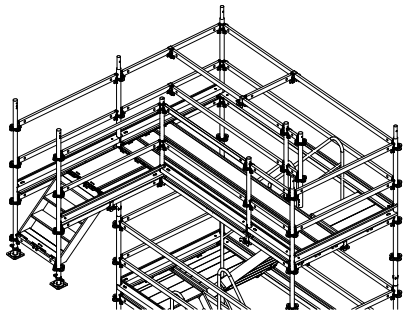

**-0.50m Run-off at the top**

-0.50m RUN-OFF						
Art No	Article description	Qty	Unit	Weight	Σ Weight	
100411	Adj. Base Plate UJB 38-50/30	2	PC	3.39	6.78	
100005	Top Standard UVH 200	2	PC	9.24	18.48	
114629	Ledger UH 75 Plus	2	PC	2.73	5.46	
114641	Ledger UH 150 Plus	6	PC	4.72	28.32	
124121	Steel Deck UDG 25 x 75	3	PC	5.26	15.78	
113228	Staircase UAS 75 x 75/50, Alu	1	PC	10.10	10.10	
110793	Ledger to Ledger Coupler UHA Half	2	PC	1.09	2.18	
110160	Toeboard Steel UPY 150	2	PC	2.99	5.98	
Total weight			kg		93.08	

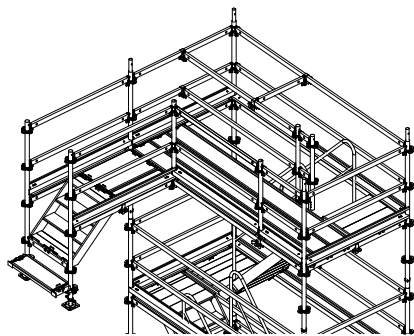

**-0.75m Run-off at the top**

-0.75m RUN-OFF						
Art No	Article description	Qty	Unit	Weight	Σ Weight	
100411	Adj. Base Plate UJB 38-50/30	2	PC	3.39	6.78	
116306	Rosett Coupler UEV 180°	2	PC	1.70	3.40	
100005	Top Standard UVH 200	2	PC	9.24	18.48	
114629	Ledger UH 75 Plus	2	PC	2.73	5.46	
114641	Ledger UH 150 Plus	6	PC	4.72	28.32	
124121	Steel Deck UDG 25 x 75	4	PC	5.26	21.04	
113228	Staircase UAS 75 x 75/50, Alu	1	PC	10.10	10.10	
110793	Ledger to Ledger Coupler UHA Half	2	PC	1.09	2.18	
110160	Toeboard Steel UPY 150	2	PC	2.99	5.98	
115959	Support UC 25	2	PC	1.16	2.32	
Total weight			kg		104.06	



**PERI Ltd.**

Clifton Upon Dunsmore  
Rugby  
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

**PERI UP STAIR TOWERS COMPLIANCE SHEET**

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	RUN-OFFS. MATERIAL LIST		June 2022	48